

# BALANCE STANDARD FORMULA LIST

Balance Grade		G0.4	G1	G2.5	G6.3	G16	G40	G100	G250	G630	G1600	G4000
Precision Required	exw (mm/s)	0.4	1	2.5	6.3	16	40	100	250	630	1600	4000
Precision Required	exw (μm *rpm)	3820	9549	23875	60165	152800	382000	954900	2387500	6016500	15280000	38200000

SETTING OF THE BALANCE SERIES IS ACCORDING TO ISO 1940 STANDARD .


THE FORMULA AS FOLLOWS:

$$U = M \times e$$


$$U = \frac{G \times M}{n} \times 9549$$

$$G = \frac{n \times U}{9549 \times M}$$

G = UNBALANCE SERIES  
 U = UNBALANCE (g-mm)  
 e = ECCENTRIC DISTANCE (mm)  
 M = ROTER WEIGHT (kg)  
 n = rpm  
 9549 = CONSTANT

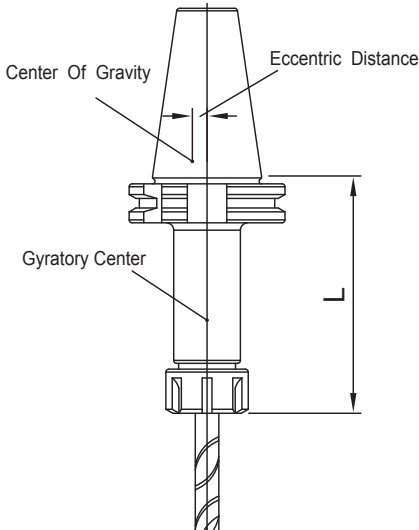

Quality levels according to ISO 1940 and permitted residual imbalance or speed

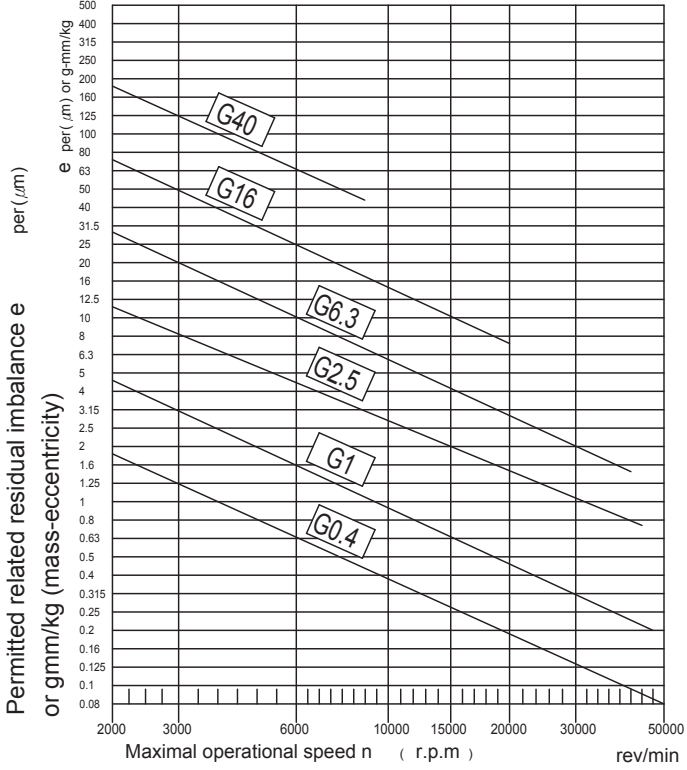

# REFERENCE DETAILS

µm



mm		H																	
		1	2	3	4	5	6	7	8	9	10	11	12	13	14 <sup>1)</sup>	15 <sup>1)</sup>	16 <sup>1)</sup>	17 <sup>1)</sup>	18 <sup>1)</sup>
Over	Under	µm											mm						
-	3 <sup>1)</sup>	+0.8 0	+1.2 0	+2 0	+3 0	+4 0	+6 0	+10 0	+14 0	+25 0	+40 0	+60 0	+0.1 0	+0.14 0	+0.25 0	+0.4 0	+0.6 0		
3	6	+1 0	+1.5 0	+2.5 0	+4 0	+5 0	+8 0	+12 0	+18 0	+30 0	+48 0	+75 0	+0.12 0	+0.18 0	+0.3 0	+0.48 0	+0.75 0	+1.2 0	+1.8 0
6	10	+1 0	+1.5 0	+2.5 0	+4 0	+6 0	+9 0	+15 0	+22 0	+36 0	+58 0	+90 0	+0.15 0	+0.22 0	+0.36 0	+0.58 0	+0.9 0	+1.5 0	+2.2 0
10	18	+1.2 0	+2 0	+3 0	+5 0	+8 0	+11 0	+18 0	+27 0	+43 0	+70 0	+110 0	+0.18 0	+0.27 0	+0.43 0	+0.7 0	+1.1 0	+1.8 0	+2.7 0
18	30	+1.5 0	+2.5 0	+4 0	+6 0	+9 0	+13 0	+21 0	+33 0	+52 0	+84 0	+130 0	+0.21 0	+0.33 0	+0.52 0	+0.84 0	+1.3 0	+2.1 0	+3.3 0
30	50	+1.5 0	+2.5 0	+4 0	+7 0	+11 0	+16 0	+25 0	+39 0	+62 0	+100 0	+160 0	+0.25 0	+0.39 0	+0.62 0	+1 0	+1.6 0	+2.5 0	+3.9 0
50	80	+2 0	+3 0	+5 0	+8 0	+13 0	+19 0	+30 0	+46 0	+74 0	+120 0	+190 0	+0.3 0	+0.46 0	+0.74 0	+1.2 0	+1.9 0	+3 0	+4.6 0
80	120	+2.5 0	+4 0	+6 0	+10 0	+15 0	+22 0	+35 0	+54 0	+87 0	+140 0	+220 0	+0.35 0	+0.54 0	+0.87 0	+1.4 0	+2.2 0	+3.5 0	+5.4 0
120	180	+3.5 0	+5 0	+8 0	+12 0	+18 0	+25 0	+40 0	+63 0	+100 0	+160 0	+250 0	+0.4 0	+0.63 0	+1 0	+1.6 0	+2.5 0	+4 0	+6.3 0
180	250	+4.5 0	+7 0	+10 0	+14 0	+20 0	+29 0	+46 0	+72 0	+115 0	+185 0	+290 0	+0.46 0	+0.72 0	+1.15 0	+1.85 0	+2.9 0	+4.6 0	+7.2 0
250	315	+6 0	+8 0	+12 0	+16 0	+23 0	+32 0	+52 0	+81 0	+130 0	+210 0	+320 0	+0.52 0	+0.81 0	+1.3 0	+2.1 0	+3.2 0	+5.2 0	+8.1 0
315	400	+7 0	+9 0	+13 0	+18 0	+25 0	+36 0	+57 0	+89 0	+140 0	+230 0	+360 0	+0.57 0	+0.89 0	+1.4 0	+2.3 0	+3.6 0	+5.7 0	+8.9 0
400	500	+8 0	+10 0	+15 0	+20 0	+27 0	+40 0	+63 0	+97 0	+155 0	+250 0	+400 0	+0.63 0	+0.97 0	+1.55 0	+2.5 0	+4 0	+6.3 0	+9.7 0

mm		h																	
		1	2	3	4	5	6	7	8	9	10	11	12	13	14 <sup>1)</sup>	15 <sup>1)</sup>	16 <sup>1)</sup>	17	18
Over	Under	µm											mm						
-	3 <sup>1)</sup>	0 -0.8	0 -1.2	0 -2	0 -3	0 -4	0 -6	0 -10	0 -14	0 -25	0 -40	0 -60	0 -0.1	0 -0.14	0 -0.25	0 -0.4	0 -0.6		
3	6	0 -1	0 -1.5	0 -2.5	0 -4	0 -5	0 -8	0 -12	0 -18	0 -30	0 -48	0 -75	0 -0.12	0 -0.18	0 -0.3	0 -0.48	0 -0.75	0 -1.2	0 -1.8
6	10	0 -1	0 -1.5	0 -2.5	0 -4	0 -6	0 -9	0 -15	0 -22	0 -36	0 -58	0 -90	0 -0.15	0 -0.22	0 -0.36	0 -0.58	0 -0.9	0 -1.5	0 -2.2
10	18	0 -1.2	0 -2	0 -3	0 -5	0 -8	0 -11	0 -18	0 -27	0 -43	0 -70	0 -110	0 -0.18	0 -0.27	0 -0.43	0 -0.7	0 -1.1	0 -1.8	0 -2.7
18	30	0 -1.5	0 -2.5	0 -4	0 -6	0 -9	0 -13	0 -21	0 -33	0 -52	0 -84	0 -130	0 -0.21	0 -0.33	0 -0.52	0 -0.84	0 -1.3	0 -2.1	0 -3.3
30	50	0 -1.5	0 -2.5	0 -4	0 -7	0 -11	0 -16	0 -25	0 -39	0 -62	0 -100	0 -160	0 -0.25	0 -0.39	0 -0.62	0 -1	0 -1.6	0 -2.5	0 -3.9
50	80	0 -2	0 -3	0 -5	0 -8	0 -13	0 -19	0 -30	0 -46	0 -74	0 -120	0 -190	0 -0.3	0 -0.46	0 -0.74	0 -1.2	0 -1.9	0 -3	0 -4.6
80	120	0 -2.5	0 -4	0 -6	0 -10	0 -15	0 -22	0 -35	0 -54	0 -87	0 -140	0 -220	0 -0.35	0 -0.54	0 -0.87	0 -1.4	0 -2.2	0 -3.5	0 -5.4
120	180	0 -3.5	0 -5	0 -8	0 -12	0 -18	0 -25	0 -40	0 -63	0 -100	0 -160	0 -250	0 -0.4	0 -0.63	0 -1	0 -1.6	0 -2.5	0 -4	0 -6.3
180	250	0 -4.5	0 -7	0 -10	0 -14	0 -20	0 -29	0 -46	0 -72	0 -115	0 -185	0 -290	0 -0.46	0 -0.72	0 -1.15	0 -1.85	0 -2.9	0 -4.6	0 -7.2
250	315	0 -6	0 -8	0 -12	0 -16	0 -23	0 -32	0 -52	0 -81	0 -130	0 -210	0 -320	0 -0.52	0 -0.81	0 -1.3	0 -2.1	0 -3.2	0 -5.2	0 -8.1
315	400	0 -7	0 -9	0 -13	0 -18	0 -25	0 -36	0 -57	0 -89	0 -140	0 -230	0 -360	0 -0.57	0 -0.89	0 -1.4	0 -2.3	0 -3.6	0 -5.7	0 -8.9
400	500	0 -8	0 -10	0 -15	0 -20	0 -27	0 -40	0 -63	0 -97	0 -155	0 -250	0 -400	0 -0.63	0 -0.97	0 -1.55	0 -2.5	0 -4	0 -6.3	0 -9.7



# REFERENCE DETAILS

## 參考資料

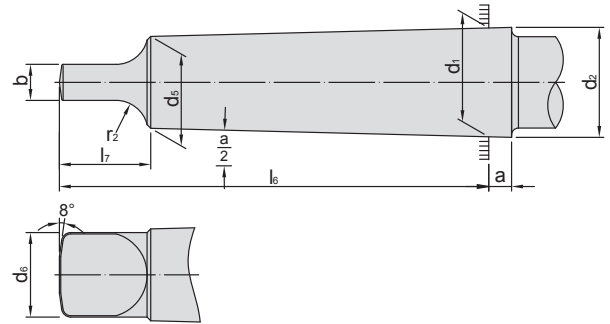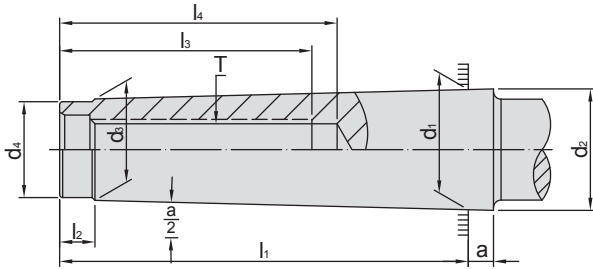

### DIN 228 FORM A <Drawing Thread Type>

M.T.NO.	a	d <sub>1</sub>	d <sub>2</sub>	d <sub>3</sub>	d <sub>4</sub> max.	T	l <sub>1</sub> max.	l <sub>2</sub>	l <sub>3</sub> min.	l <sub>4</sub> min.
2	5	17.78	18	14.6	14	3/8" 16W, M10 x 1.5P	64	5	24	31.5
3	5	23.825	24.1	19.8	19	1/2" 12W, M12 x 1.75P	81	7	24	33.5
4	6.5	31.267	31.6	25.9	25	5/8" 11W, M16 x 2.0P	102.5	9	32	42.5
5	6.5	44.399	44.7	37.6	35.7	1" 8W, M24 x 3.0P	129.5	10	40	52.5
6	8	63.348	63.8	53.9	51	1" 8W, M24 x 3.0P	182	16	47	61.5

### DIN 228 FORM B <Tongue Type>

M.T.NO.	a	b h13	d <sub>5</sub>	d <sub>6</sub> max.	l <sub>6</sub> 0 -1	l <sub>7</sub> max.	r <sub>2</sub>	$\frac{\alpha}{2}$
2	5	6.3	14	13.5	75	16	6	1°25' 50"
3	5	7.9	19.1	18.5	94	20	7	1°26' 16"
4	6.5	11.9	25.2	24.5	117.5	24	8	1°29' 15"
5	6.5	15.9	36.5	35.7	149.5	29	10	1°30' 26"
6	8	19	52.4	51	210	40	13	1°29' 36"

### JACOBS TAPER

TYPE	$\theta/2$ TAPER	D	d <sub>1</sub>	L
JT 2	2° 19'52"	14.199	12.386	22.225
JT33	1° 49'01"	15.850	14.237	25.400
JT 6	1° 29'10"	17.170	15.852	25.400
JT 3	1° 31'26"	20.599	18.951	30.956
JT 4	1° 29'59"	28.550	26.346	42.069
JT 5	1° 29'05"	35.890	33.422	47.625

### DIN 238

TYPE	$\theta/2$ TAPER	D	d <sub>1</sub>	L
B12	1° 25'43"	12.065	11.1	18.5
B16	1° 25'50"	15.733	14.5	24.0
B18	1° 25'50"	17.780	16.2	32.0

### DRILL CHUCK HOLE TAPER SPECIFICATION

