

BMT CATEGORY

BMT STATIC TOOL HOLDER


K-2-6

BMT STATIC TOOL HOLDER

SINGLE HEAD TYPE

BMT 固定型單頭刀座

(Radial 徑向)

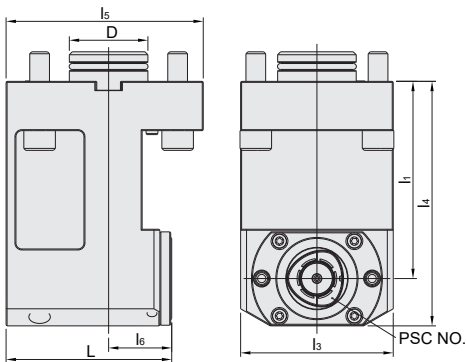

Machine Brand: DMG MORI

Machine Type: NLX1500-2500 (20 ST) / NZX2000-800 (16 ST)

MODEL NO.	TYPE	PSC NO.	D	L	I ₁	I ₃	I ₄	I ₅	I ₆	RIGHT/LEFT HAND	WEIGHT (KGS)
5370-S1R-021-01	BMT40 - I1SC4R - DM	PSC40	40	84	100	77.4	124	100	32	R	5.13
5370-S1L-021-01	BMT40 - I1SC4L - DM	PSC40	40	84	100	77.4	124	100	32	L	5.13

Features:

- ▶ The jaw clamping design allows quick tool change and tool can be measured offline in advance, reducing downtime and improving processing efficiency.
- ▶ Applicable machine type: Turn-mill multitasking machine. Applicable industry: Automation, electronics and spare parts industries.
- ▶ Clamping force is inspected individually before delivery.
- ▶ Built-in with center coolant mechanism, and coolant pressure can be up to 70BAR.
- ▶ Used with the PSC taper tools, which have the features of bending strength, and superior repeat positioning accuracy.
- ▶ Suitable for turning and center hole drilling and tapping.

PSC Cover



P.X-129




BMT STATIC TOOL HOLDER

DUAL HEAD TYPE

BMT

BMT 固定型雙頭刀座


(Radial 徑向)

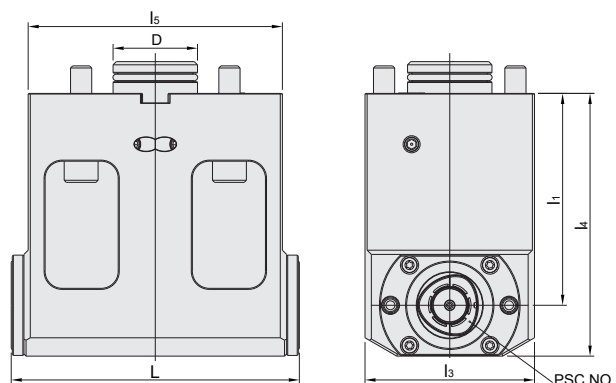

Machine Brand: DMG MORI

Machine Type: NLX1500-2500 (20 ST) / NZX2000-800 (16 ST)

MODEL NO.	TYPE	PSC NO.	D	L	I ₁	I ₃	I ₄	I ₅	RIGHT/LEFT HAND	WEIGHT (KGS)
5370-S2L-021-01	BMT40 - I2SC4R - DM	PSC40	40	136	100	80	124	120	R	7.61
5370-S2R-021-01	BMT40 - I2SC4L - DM	PSC40	40	136	100	80	124	120	L	7.61

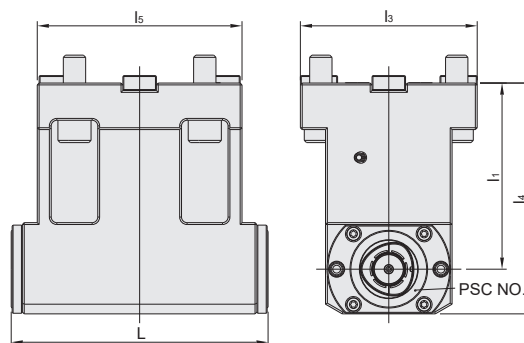

Machine Brand: TAKISAWA TAIWAN

Machine Type: NX2500 YS (15 ST)

MODEL NO.	TYPE	PSC NO.	L	I ₁	I ₃	I ₄	I ₅	RIGHT/LEFT HAND	WEIGHT (KGS)
5374-T2R-021	BMT65 - I2SC4R - TA	PSC40	138	100	95	124	110	R	7.38
5374-T2L-021	BMT65 - I2SC4L - TA	PSC40	138	100	95	124	110	L	7.38
5374-T2R-031	BMT65 - I2SC5R - TA	PSC50	162	100	95	132	110	R	8.85
5374-T2L-031	BMT65 - I2SC5L - TA	PSC50	162	100	95	132	110	L	8.85

Machine Brand: VICTOR TAICHUNG

Machine Type: A200 (12 ST)

MODEL NO.	TYPE	PSC NO.	L	I ₁	I ₃	I ₄	I ₅	RIGHT/LEFT HAND	WEIGHT (KGS)
5372-O2R-021	BMT55 - I2SC4R - OR	PSC40	138	70	84	94	102	R	5.11
5372-O2L-021	BMT55 - I2SC4L - OR	PSC40	138	70	84	94	102	L	5.11

Features:

- ▶ The jaw clamping design allows quick tool change and tool can be measured offline in advance, reducing downtime and improving processing efficiency.
- ▶ Applicable machine type: Turn-mill multitasking machine. Applicable industry: Automation, electronics and spare parts industries.
- ▶ Clamping force is inspected individually before delivery.
- ▶ Built-in with center coolant mechanism, and coolant pressure can be up to 70BAR.
- ▶ Used with the PSC taper tools, which have the features of bending strength, and superior repeat positioning accuracy.
- ▶ Suitable for turning and center hole drilling and tapping.

PSC Cover



P.X-129




BMT STATIC TOOL HOLDER

SINGLE HEAD TYPE

BMT 固定型單頭刀座

(Axial 軸向)

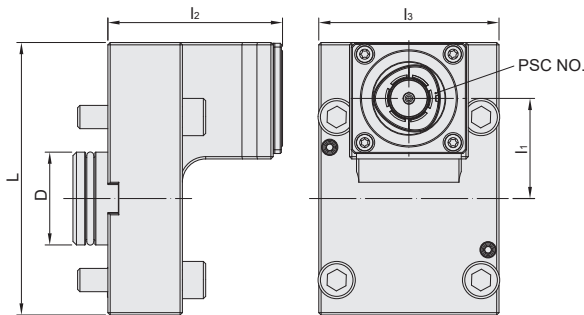

Machine Brand: DMG MORI

Machine Type: NLX1500-2500 (20 ST) / NZX2000-800 (16 ST)

MODEL NO.	TYPE	PSC NO.	D	L	L ₁	L ₂	L ₃	RIGHT/LEFT HAND	WEIGHT (KGS)
5370-S0R-021-01	BMT40 - E1SC4R - DM	PSC40	40	117	43	75	77.4	R	2.72
5370-S0L-021-01	BMT40 - E1SC4L - DM	PSC40	40	117	43	75	77.4	L	2.72
5373-S0R-021-01	BMT60 - E1SC4R - DM	PSC40	60	130	41	80	108	R	4.89
5373-S0L-021-01	BMT60 - E1SC4L - DM	PSC40	60	130	41	80	108	L	4.89

Features:

- ▶ The jaw clamping design allows quick tool change and tool can be measured offline in advance, reducing downtime and improving processing efficiency.
- ▶ Applicable machine type: Turn-mill multitasking machine. Applicable industry: Automation, electronics and spare parts industries.
- ▶ Clamping force is inspected individually before delivery.
- ▶ Built-in with center coolant mechanism, and coolant pressure can be up to 70BAR.
- ▶ Used with the PSC taper tools, which have the features of bending strength, and superior repeat positioning accuracy.
- ▶ Suitable for turning and center hole drilling and tapping.

PSC Cover



P.X-129





BMT STATIC TOOL HOLDER

DUAL HEAD TYPE

BMT

BMT 固定型雙頭刀座


(Axial 軸向)

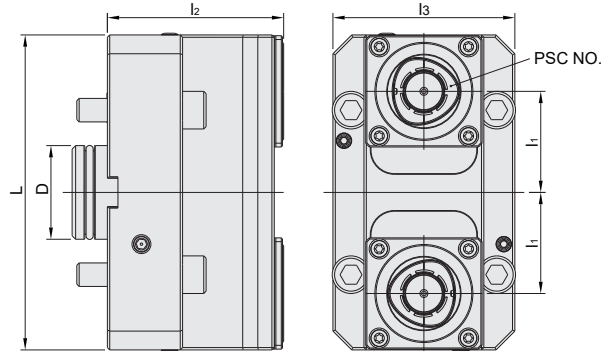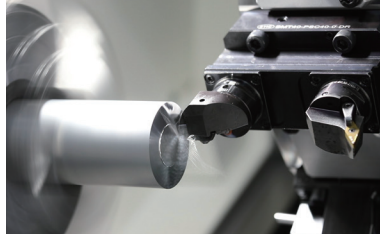

Machine Brand: DMG MORI

Machine Type: NLX1500-2500 (20 ST) / NZX2000-800 (16 ST)

MODEL NO.	TYPE	PSC NO.	D	L	I ₁	I ₂	I ₃	RIGHT/LEFT HAND	WEIGHT (KGS)
5370-S3R-021-01	BMT40 - E2SC4R - DM	PSC40	40	134	43	75	77.4	R	4.43
5370-S3L-021-01	BMT40 - E2SC4L - DM	PSC40	40	134	43	75	77.4	L	4.43

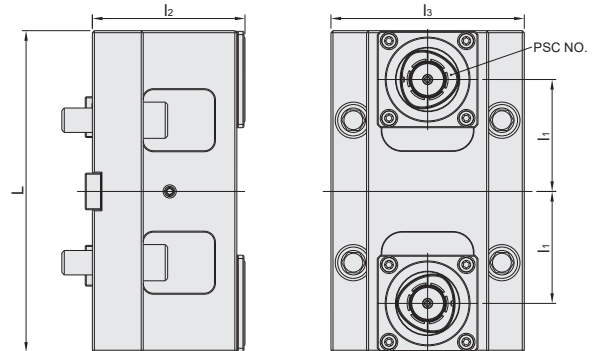

Machine Brand: TAKISAWA TAIWAN

Machine Type: NX2500 YS (15 ST)

MODEL NO.	TYPE	PSC NO.	L	I ₁	I ₂	I ₃	RIGHT/LEFT HAND	WEIGHT (KGS)
5374-T3R-021-01	BMT65 - E2SC4R - TA	PSC40	158	55	75	95	R	5.22
5374-T3L-021-01	BMT65 - E2SC4L - TA	PSC40	158	55	75	95	L	5.22

Machine Brand: VICTOR TAICHUNG

Machine Type: A200 (12 ST)

MODEL NO.	TYPE	PSC NO.	L	I ₁	I ₂	I ₃	RIGHT/LEFT HAND	WEIGHT (KGS)
5372-O3R-021	BMT55 - E2SC4R - OR	PSC40	148	50	75	84	R	4.49
5372-O3L-021	BMT55 - E2SC4L - OR	PSC40	148	50	75	84	L	4.49

Features:

- ▶ The jaw clamping design allows quick tool change and tool can be measured offline in advance, reducing downtime and improving processing efficiency.
- ▶ Applicable machine type: Turn-mill multitasking machine. Applicable industry: Automation, electronics and spare parts industries.
- ▶ Clamping force is inspected individually before delivery.
- ▶ Built-in with center coolant mechanism, and coolant pressure can be up to 70BAR.
- ▶ Used with the PSC taper tools, which have the features of bending strength, and superior repeat positioning accuracy.
- ▶ Suitable for turning and center hole drilling and tapping.

PSC Cover



P.X-129




BMT STATIC TOOL HOLDER

FOUR HEAD TYPE

BMT 固定型四孔刀座

(Axial 軸向)

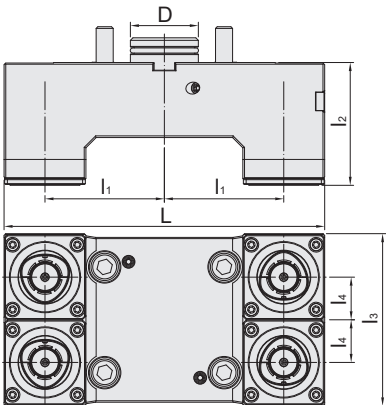

Machine Brand: **DMG MORI**
Machine Type: **NLX1500-2500 (20 ST) / NZX2000-800 (16 ST)**

MODEL NO.	TYPE	PSC NO.	D	L	l ₁	l ₂	l ₃	l ₄	RIGHT/LEFT HAND	WEIGHT (KGS)
5370-S6R-021-01	BMT40 - E2DC4R - DM	PSC40	40	188	70	72	101	25	R	7.01
5370-S6L-021-01	BMT40 - E2DC4L - DM	PSC40	40	188	70	72	101	25	L	7.01

- Features:**
- ▶ The jaw clamping design allows quick tool change and tool can be measured offline in advance, reducing downtime and improving processing efficiency.
 - ▶ Applicable machine type: Turn-mill multitasking machine. Applicable industry: Automation, electronics and spare parts industries.
 - ▶ Clamping force is inspected individually before delivery.
 - ▶ Built-in with center coolant mechanism, and coolant pressure can be up to 70BAR.
 - ▶ Used with the PSC taper tools, which have the features of bending strength, and superior repeat positioning accuracy.
 - ▶ Suitable for turning and center hole drilling and tapping.

PSC Cover



P.X-129

