

STRAIGHT SHANK TOOL HOLDER CATEGORY

STRAIGHT SHANK STA SYNCHRONIZED TAPPING HOLDER	N-2~3
NC / ER TOOL HOLDER	N-4
STRAIGHT SHANK ER TOOL HOLDER	N-5~8
ER TOOL HOLDER SYSTEM [FOR AUTOMATIC LATHE]	N-9~10
ER TAPPER [FOR CNC LATHE]	N-11
STRAIGHT SHANK SBL COLLET CHUCK	N-12
STRAIGHT SHANK SBLC COLLET CHUCK	N-13
STRAIGHT SHANK EBL COLLET CHUCK	N-14
STRAIGHT SHANK EBL TUNGSTEN STEEL COLLET CHUCK	N-15
STRAIGHT SHANK EBLC COLLET CHUCK	N-16
STRAIGHT SHANK SIDE LOCK HOLDER	N-17

STRAIGHT SHANK STA SYNCHRONIZED TAPPING HOLDER




直柄 STA 同步補償攻牙刀桿

〔ER TYPE〕



TW PAT NO. I615223
 US PAT NO. 9796059
 CN PAT NO. ZL201620889099.X
 IT PAT NO. 202023000000993

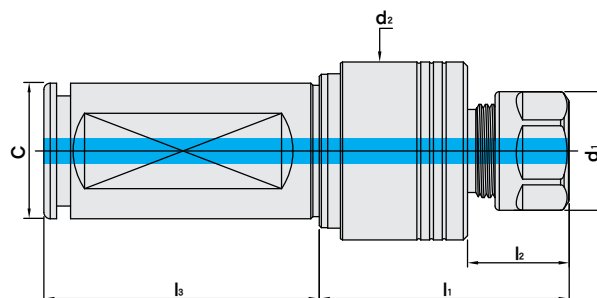

MODEL NO.	TYPE	l ₁	l ₂	l ₃	C	d ₁	d ₂	COMBINATION		WEIGHT (KGS)
								BODY	TAP ADAPTER	
5271-S22-02011-115	C20 x STA11E - 115	115	70	55	20	19	42	C20 x STA1	STA1 - ER11A - 70	0.74
5271-S22-02016-070	C20 x STA16E - 70	70	25	55	20	28	42	C20 x STA1	STA1 - ER16A - 25	0.48
5271-S22-02016-115	C20 x STA16E - 115	115	70	55	20	28	42	C20 x STA1	STA1 - ER16A - 70	0.68
5271-S22-02016-195	C20 x STA16E - 195	195	150	55	20	28	42	C20 x STA1	STA1 - ER16A - 150	1.01
5271-S22-02020-079	C20 x STA20E - 079	79	34	55	20	34	42	C20 x STA1	STA1 - ER20A - 34	0.52
5271-S22-02020-115	C20 x STA20E - 115	115	70	55	20	34	42	C20 x STA1	STA1 - ER20A - 70	0.68
5271-S22-02511-110	C25 x STA11E - 110	110	70	60	25	19	42	C25 x STA1	STA1 - ER11A - 70	0.78
5271-S22-02516-065	C25 x STA16E - 65	65	25	60	25	28	42	C25 x STA1	STA1 - ER16A - 25	0.52
5271-S22-02516-110	C25 x STA16E - 110	110	70	60	25	28	42	C25 x STA1	STA1 - ER16A - 70	0.72
5271-S22-02516-190	C25 x STA16E - 190	190	150	60	25	28	42	C25 x STA1	STA1 - ER16A - 150	1.05
5271-S22-02520-074	C25 x STA20E - 74	74	34	60	25	34	42	C25 x STA1	STA1 - ER20A - 34	0.52
5271-S22-02520-110	C25 x STA20E - 110	110	70	60	25	34	42	C25 x STA1	STA1 - ER20A - 70	0.72
5271-S22-03211-105	C32 x STA11E - 105	105	70	65	32	19	42	C32 x STA1	STA1 - ER11A - 70	0.89
5271-S22-03216-060	C32 x STA16E - 60	60	25	65	32	28	42	C32 x STA1	STA1 - ER16A - 25	0.63
5271-S22-03216-105	C32 x STA16E - 105	105	70	65	32	28	42	C32 x STA1	STA1 - ER16A - 70	0.83
5271-S22-03216-185	C32 x STA16E - 185	185	150	65	32	28	42	C32 x STA1	STA1 - ER16A - 150	1.16
5271-S22-03220-069	C32 x STA20E - 69	69	34	65	32	34	42	C32 x STA1	STA1 - ER20A - 34	0.67
5271-S22-03220-105	C32 x STA20E - 105	105	70	65	32	34	42	C32 x STA1	STA1 - ER20A - 70	0.83
5271-S22-03232-100	C32 x STA32E - 100	100	40	65	32	50	58	C32 x STA2	STA2 - ER32 - 40	1.34
5271-S22-03232-130	C32 x STA32E - 130	130	70	65	32	50	58	C32 x STA2	STA2 - ER32 - 70	1.57
5271-S22-04011-105	C40 x STA11E - 105	105	70	75	40	19	42	C40 x STA1	STA1 - ER11A - 70	1.21
5271-S22-04016-060	C40 x STA16E - 60	60	25	75	40	28	42	C40 x STA1	STA1 - ER16A - 25	0.95
5271-S22-04016-105	C40 x STA16E - 105	105	70	75	40	28	42	C40 x STA1	STA1 - ER16A - 70	1.15
5271-S22-04016-185	C40 x STA16E - 185	185	150	75	40	28	42	C40 x STA1	STA1 - ER16A - 150	1.48
5271-S22-04020-069	C40 x STA20E - 69	69	34	75	40	34	42	C40 x STA1	STA1 - ER20A - 34	0.99
5271-S22-04020-105	C40 x STA20E - 105	105	70	75	40	34	42	C40 x STA1	STA1 - ER20A - 70	1.15
5271-S22-04032-095	C40 x STA32E - 95	95	40	75	40	50	58	C40 x STA2	STA2 - ER32 - 40	1.64
5271-S22-04032-125	C40 x STA32E - 125	125	70	75	40	50	58	C40 x STA2	STA2 - ER32 - 70	1.87

Features:

- ▶ Internal steel component allows the micro-compensation for the misfeed of spindle ballscrew and overload. Improve tapping quality and tap life. Optimum male and female threaded fitting is achieved due to the premium design!
- ▶ To prevent from interfering, the longer adapter can be custom made.
- ▶ Coolant-through is available with coolant pressure up to 70 bar. STA has long use life even the synchronized micro-compensation mechanism is used at high coolant pressure.
- ▶ Modular design to meet more diverse demand.
- ▶ One of SYIC products patented by US invention.

Application:

- ▶ Ideal for everyday tapping, high speed and high production tapping for modern CNC machines capable of rigid tapping.
- ▶ Also ideal for high-end tapping applications in modern CNC machines (small taps or difficult materials resulting in high torque loads).

Standard Accessory: • NUT

Collet	Nut	Spigot Interchangeable Digital	Torque Wrench Adapter (Nut)	Spanner	Tap Adapter for STA
					
P.X-19~44	P.X-63,65~67	P.X-81	P.X-82	P.X-87~88	P.X-110


STRAIGHT SHANK

STA SYNCHRONIZED TAPPING HOLDER BODY

直柄 STA 同步補償攻牙刀桿本體



TW PAT NO. I615223
 US PAT NO. 9796059
 CN PAT NO. ZL201620889099.X
 IT PAT NO. 202023000000993

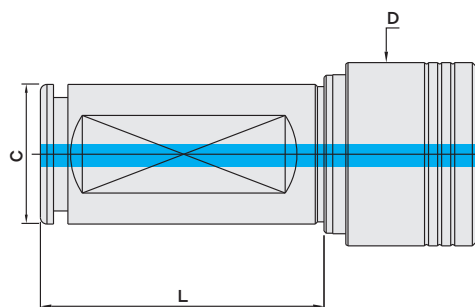

MODEL NO.	TYPE	L	C	D	STA NO.	WEIGHT (KGS)
5271-795-02001-055	C20 x STA1 - 55	55	20	42	1	0.38
5271-795-02501-060	C25 x STA1 - 60	60	25	42	1	0.42
5271-795-03201-065	C32 x STA1 - 65	65	32	42	1	0.52
5271-795-03202-065	C32 x STA2 - 65	65	32	58	2	0.90
5271-795-04001-075	C40 x STA1 - 75	75	40	42	1	0.82
5271-795-04002-075	C40 x STA2 - 75	75	40	58	2	1.13




NC / ER TOOL HOLDER



O-ring seals coolant



NC / ER 刀桿

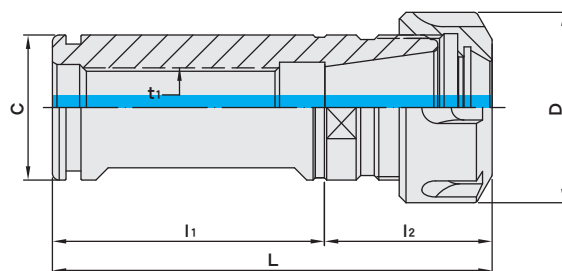

MODEL NO.	TYPE	L	l ₁	l ₂	D	C	t ₁	WEIGHT (KGS)
5273-110-03225-060	C32 x NC/ER25 - 60	97	60	37	42	32	M18 x 1.5P	0.70
5273-110-03232-060	C32 x NC/ER32 - 60	103	60	43	50	32	M22 x 1.5P	0.75
5273-110-04032-080	C40 x NC/ER32 - 80	118	80	38	50	40	M22 x 1.5P	1.25
5273-110-04040-075	C40 x NC/ER40 - 75	135	75	60	63	40	M28 x 1.5P	1.30
5273-110-04532-120	C45 x NC/ER32 - 120	178	120	58	50	45	M22 x 1.5P	1.60
5273-110-04540-120	C45 x NC/ER40 - 120	180	120	60	63	45	M28 x 1.5P	1.65
5273-110-A7225-060	C1-1/4" x NC/ER25 - 60	97	60	37	42	31.75	M18 x 1.5P	0.70
5273-110-A7232-060	C1-1/4" x NC/ER32 - 60	103	60	43	50	31.75	M22 x 1.5P	0.75
5273-110-A7240-060	C1-1/4" x NC/ER40 - 60	120	60	60	63	31.75	M22 x 1.5P	0.84
5273-110-A8032-080	C1-1/2" x NC/ER32 - 80	118	80	38	50	38.1	M22 x 1.5P	1.25
5273-110-A8040-075	C1-1/2" x NC/ER40 - 75	135	75	60	63	38.1	M28 x 1.5P	1.30

ERS

ERS-FID

ERS-FOD



Features:

- ▶ This is specially suitable for CNC Machines but can also be used for general machines.
- ▶ At the end of body, there's an O-ring for sealing.

Standard Accessory: • NUT


Collet	Nut	Spigot Interchangeable Digital	Torque Wrench Adapter (Nut)	Spanner	Preset Screw
P.X-19~45	P.X-63、67	P.X-81	P.X-82	P.X-87~88	P.X-121

STRAIGHT SHANK ER TOOL HOLDER



直柄 ER 刀桿

[ISO 15488]

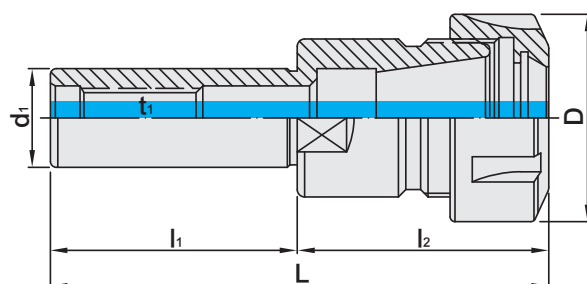

MODEL NO.	TYPE	L	l ₁	l ₂	D	d ₁	t ₁	WEIGHT (KGS)
5271-108-01611-140	C16 x ER11A - 140	156.6	140	16.6	19	16	M6 x 1.0P	0.23
5271-108-01616-050	C16 x ER16A - 50	90	50	40	28	16	M10 x 1.5P	0.15
5271-108-01616-100	C16 x ER16A - 100	140	100	40	28	16	M10 x 1.5P	0.20
5271-108-01616-150	C16 x ER16A - 150	190	150	40	28	16	M10 x 1.5P	0.28
5271-108-02016-050	C20 x ER16A - 50	90	50	40	28	20	M12 x 1.75P	0.25
5271-108-02016-100	C20 x ER16A - 100	140	100	40	28	20	M12 x 1.75P	0.35
5271-108-02016-150	C20 x ER16A - 150	190	150	40	28	20	M12 x 1.75P	0.40
5271-108-02020-060	C20 x ER20A - 60	100.5	60	40.5	34	20	M12 x 1.75P	0.35
5271-108-02020-120	C20 x ER20A - 120	160.5	120	40.5	34	20	M12 x 1.75P	0.40
5271-108-02020-180	C20 x ER20A - 180	220.5	180	40.5	34	20	M12 x 1.75P	0.50
5271-110-02025-050	C20 x ER25 - 50	101	50	51	42	20	M12 x 1.75P	0.35
5271-110-02025-100	C20 x ER25 - 100	151	100	51	42	20	M12 x 1.75P	0.40
5271-110-02032-050	C20 x ER32 - 50	101.5	50	51.5	50	20	M12 x 1.75P	0.45
5271-110-02032-100	C20 x ER32 - 100	151.5	100	51.5	50	20	M10 x 1.5P	0.42
5271-108-02516-150	C25 x ER16A - 150	176.6	150	26.6	28	25	M10 x 1.5P	0.55
5271-110-02525-050	C25 x ER25 - 50	101	50	51	42	25	M16 x 2.0P	0.40
5271-110-02525-100	C25 x ER25 - 100	151	100	51	42	25	M16 x 2.0P	0.50
5271-110-02532-050	C25 x ER32 - 50	101.5	50	51.5	50	25	M16 x 2.0P	0.60
5271-110-02532-100	C25 x ER32 - 100	151.5	100	51.5	50	25	M16 x 2.0P	0.80
5271-110-02540-050	C25 x ER40 - 50	115	50	65	63	25	M16 x 2.0P	2.10
5271-110-03225-050	C32 x ER25 - 50	101	50	51	42	32	M16 x 2.0P	1.00
5271-110-03232-060	C32 x ER32 - 60	111.5	60	51.5	50	32	M16 x 2.0P	1.15
5271-110-03232-100	C32 x ER32 - 100	151.5	100	51.5	50	32	M16 x 2.0P	1.40
5271-110-03240-050	C32 x ER40 - 50	115	50	65	63	32	M16 x 2.0P	2.00

Features:

- ▶ Each body has been locked with a nut as attachment, but without a spanner and collets.
- ▶ For complete set, please refer to P.Y-7.

Standard Accessory: • NUT


Collet	Nut	Spigot Interchangeable Digital	Torque Wrench Adapter (Nut)	Spanner	Preset Screw
P.X-19~45	P.X-63、67	P.X-81	P.X-82	P.X-87~88	P.X-121



STRAIGHT SHANK ER TOOL HOLDER

直柄 ER 刀桿

[ISO 15488]

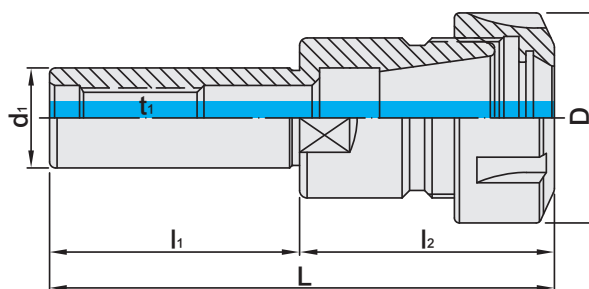

MODEL NO.	TYPE	L	l ₁	l ₂	D	d ₁	t ₁	WEIGHT (KGS)
5271-108-A3211-140	C 1/2" x ER11A - 140	156.6	140	16.6	19	12.7	M6 x 1.0P	0.50
5271-108-A4011-140	C 5/8" x ER11A - 140	156.6	140	16.6	19	15.875	M6 x 1.0P	0.23
5271-108-A4016-060	C 5/8" x ER16A - 60	95.1	60	35.1	28	15.875	M10 x 1.5P	0.12
5271-108-A4816-050	C 3/4" x ER16A - 50	85.1	50	35.1	28	19.05	M10 x 1.5P	0.20
5271-108-A4816-100	C 3/4" x ER16A - 100	135.1	100	35.1	28	19.05	M10 x 1.5P	0.25
5271-108-A4816-140	C 3/4" x ER16A - 140	175.1	140	35.1	28	19.05	M10 x 1.5P	0.25
5271-108-A4820-064	C 3/4" x ER20A - 63.5	104	63.5	40.5	34	19.05	M12 x 1.75P	1.00
5271-108-A6420-140	C 1" x ER20A - 140	167.5	140	27.5	34	25.4	M12 x 1.75P	0.50
5271-110-A6425-050	C 1" x ER25 - 50	101	50	51	42	25.4	M16 x 2.0P	0.95
5271-110-A6432-050	C 1" x ER32 - 50	101.5	50	51.5	50	25.4	M16 x 2.0P	1.00
5271-110-A6432-140	C 1" x ER32 - 140	191.5	140	51.5	50	25.4	M16 x 2.0P	1.50
5271-110-A6440-050	C 1" x ER40 - 50	115	50	65	63	25.4	M16 x 2.0P	2.10
5271-110-A7232-060	C 1-1/4" x ER32 - 60	111.5	60	51.5	50	31.75	M16 x 2.0P	1.15

Features:

- ▶ Each body has been locked with a nut as attachment, but without a spanner and collets.
- ▶ For complete set, please refer to P.Y-7.

Standard Accessory: • NUT


Collet	Nut	Spigot Interchangeable Digital	Torque Wrench Adapter (Nut)	Spanner	Preset Screw
P.X-19~45	P.X-63、67	P.X-81	P.X-82	P.X-87~88	P.X-121

STRAIGHT SHANK ER TOOL HOLDER MINI TYPE



小徑 / 直柄 ER 刀桿

(ISO 15488)

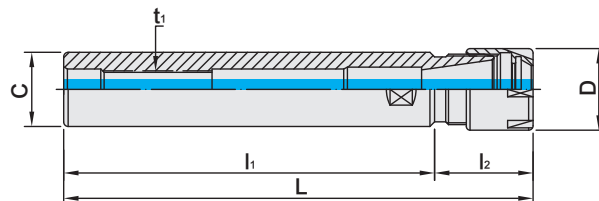

MODEL NO.	TYPE	L	l ₁	l ₂	D	C	t ₁	WEIGHT (KGS)
5271-123-00808-055	C8 x ER8M - 55	78.2	55	23.2	12	8	-	0.05
5271-123-01008-100	C10 x ER8M - 100	116.2	100	16.2	12	10	-	0.11
5271-123-01008-150	C10 x ER8M - 150	166.2	150	16.2	12	10	-	0.12
5271-123-01008-180	C10 x ER8M - 180	196.2	180	16.2	12	10	-	0.15
5271-123-01208-055	C12 x ER8M - 55	71.2	55	16.2	12	12	-	0.20
5271-123-01208-120	C12 x ER8M - 120	136.2	120	16.2	12	12	-	0.30
5271-123-01211-080	C12 x ER11M - 80	96.6	80	16.6	16	12	M5 x 0.8P	0.23
5271-123-01611-050	C16 x ER11M - 50	66.6	50	16.6	16	16	M5 x 0.8P	0.25
5271-123-01611-100	C16 x ER11M - 100	116.6	100	16.6	16	16	M5 x 0.8P	0.23
5271-123-01611-120	C16 x ER11M - 120	136.6	120	16.6	16	16	M5 x 0.8P	0.29
5271-123-01611-140	C16 x ER11M - 140	156.6	140	16.6	16	16	M5 x 0.8P	0.35
5271-123-01216-080	C12 x ER16M - 80	116.6	80	36.6	22	12	M5 x 0.8P	0.38
5271-123-02016-060	C20 x ER16M - 60	86.6	60	26.6	22	20	M10 x 1.5P	0.40
5271-123-02016-100	C20 x ER16M - 100	126.6	100	26.6	22	20	M10 x 1.5P	0.42
5271-123-02016-140	C20 x ER16M - 140	166.6	140	26.6	22	20	M10 x 1.5P	0.35
5271-123-02016-160	C20 x ER16M - 160	186.6	160	26.6	22	20	M10 x 1.5P	0.38
5271-123-02020-060	C20 x ER20M - 60	100	60	40	28	20	M12 x 1.75P	0.40
5271-123-02020-100	C20 x ER20M - 100	140	100	40	28	20	M12 x 1.75P	0.45
5271-123-02020-120	C20 x ER20M - 120	160	120	40	28	20	M12 x 1.75P	0.50
5271-123-02020-150	C20 x ER20M - 150	190	150	40	28	20	M12 x 1.75P	0.55
5271-123-02020-180	C20 x ER20M - 180	220	180	40	28	20	M12 x 1.75P	0.60
5271-123-02220-140	C22 x ER20M - 140	180	140	40	28	22	M12 x 1.75P	0.38
5271-123-02520-140	C25 x ER20M - 140	168	140	28	28	25	M12 x 1.75P	0.15
5271-123-02025-100	C20 x ER25M - 100	150	100	50	35	20	M12 x 1.75P	0.20

Features:

- ▶ Each body has been locked with a nut as attachment, but without a spanner and collets.
- ▶ Not including preset screw, please purchase separately.

Standard Accessory: • NUT

Collet	Nut	Spigot Interchangeable Digital	Torque Wrench Adapter (Nut)	Spanner	Preset Screw
P.X-19~45	P.X-64	P.X-81	P.X-82	P.X-87	P.X-121




STRAIGHT SHANK ER TOOL HOLDER MINI TYPE



小徑 / 直柄 ER 刀桿

[ISO 15488]

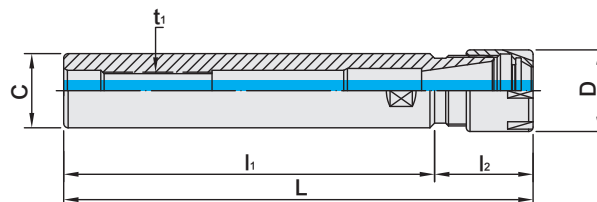

MODEL NO.	TYPE	L	l ₁	l ₂	D	C	t ₁	WEIGHT (KGS)
5271-123-A2408-100	C3/8" x ER8M - 100	117	100	17	12	9.525	-	0.23
5271-123-A3208-078	C1/2" x ER8M - 78	95	78	17	12	12.7	-	0.20
5271-123-A3211-140	C1/2" x ER11M - 140	156.6	140	16.6	16	12.7	M5 x 0.8P	0.16
5271-123-A4011-140	C5/8" x ER11M - 140	156.6	140	16.6	16	15.875	M5 x 0.8P	0.20
5271-123-A6425-140	C1" x ER25M - 140	190	140	50	35	25.4	M16 x 2.0P	0.23
5271-123-A3216-140	C1/2" x ER16M - 140	177	140	37	22	12.7	M16 x 2.0P	0.50
5271-123-A4816-140	C3/4" x ER16M - 140	165	140	25	22	19.05	M10 x 1.5P	0.25
5271-123-A6420-140	C1" x ER20M - 140	168	140	28	28	25.4	M12 x 1.75P	0.50
5271-123-A4825-100	C3/4" x ER25M - 100	150	100	50	35	19.05	M12 x 1.75P	0.35

Features:

- ▶ Each body has been locked with a nut as attachment, but without a spanner and collets.
- ▶ Not including preset screw, please purchase separately.


Standard Accessory: • NUT

Collet	Nut	Spigot Interchangeable Digital	Torque Wrench Adapter (Nut)	Spanner	Preset Screw
P.X-19~45	P.X-64	P.X-81	P.X-82	P.X-87	P.X-121

DOUBLE-ENDED STRAIGHT SHANK ER TOOL HOLDER FOR AUTOMATIC LATHE




直柄兩端 ER 自動車床用刀桿

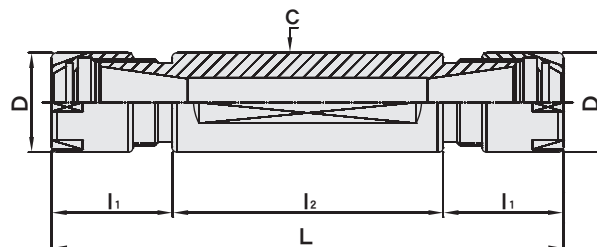

MODEL NO.	TYPE	L	l ₁	l ₂	C	D	WEIGHT (KGS)
5270-123-02011-030	DE20 x ER11M - 30	63.2	16.6	30	20	16	0.09
5270-123-02011-050	DE20 x ER11M - 50	83.2	16.6	50	20	16	0.12
5270-123-02011-075	DE20 x ER11M - 75	108.2	16.6	75	20	16	0.12
5270-123-02016-050	DE20 x ER16M - 50	103.2	26.6	50	20	22	0.10
5270-123-02016-055	DE20 x ER16M - 55	108.2	26.6	55	20	22	0.12
5270-123-02016-075	DE20 x ER16M - 75	128.2	26.6	75	20	22	0.12
5270-123-02211-060	DE22 x ER11M - 60	93.2	16.6	60	22	16	0.12
5270-123-02211-100	DE22 x ER11M - 100	133.2	16.6	100	22	16	0.14
5270-123-02216-055	DE22 x ER16M - 55	108.2	26.6	55	22	22	0.17
5270-123-02216-060	DE22 x ER16M - 60	113.2	26.6	60	22	22	0.14
5270-123-02216-075	DE22 x ER16M - 75	128.2	26.6	75	22	22	0.21
5270-123-02216-100	DE22 x ER16M - 100	153.2	26.6	100	22	22	0.16
5270-123-02311-060	DE23 x ER11M - 60	93.2	16.6	60	23	16	0.16
5270-123-02311-100	DE23 x ER11M - 100	133.2	16.6	100	23	16	0.18
5270-123-02316-060	DE23 x ER16M - 60	113.2	26.6	60	23	22	0.20
5270-123-02316-100	DE23 x ER16M - 100	153.2	26.6	100	23	22	0.21
5270-123-02516-062	DE25 x ER16M - 62	115.2	26.6	62	25	22	0.23

- ▶ Hardness: body HRC56-60, thread HRC44-46, Two-parted rigidity design.
- ▶ The concentricity of the internal hole is 0.005mm, which extends tool life.
- ▶ The tolerance of the chuck's diameter is -0.005-0.008mm with high operation efficiency.
- ▶ The flat side of the holder is for the side lock screw to fasten.
- ▶ Used with ER collets
- ▶ TYPE C20 is suitable for the brand, TAKAMAZ CITIZEN MIYANO, conforming to SWISS MODEL.
- ▶ TYPE C22 is suitable for the brand, STAR, conforming to the SWISS MODEL.
- ▶ TYPE C22 is suitable for the brand, NOMURA, conforming to the SWISS MODEL.

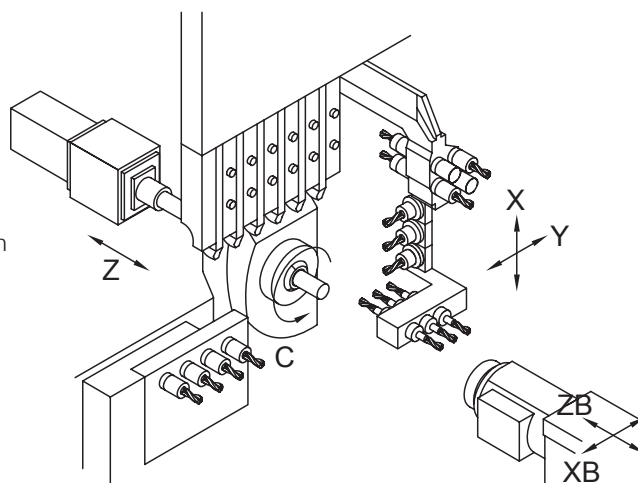

Standard Accessory: • NUT


Collet	Nut	Spigot Interchangeable Digital	Torque Wrench Adapter (Nut)	Spanner	Preset Screw
P.X-19~45	P.X-64	P.X-81	P.X-82	P.X-87	P.X-121



STRAIGHT SHANK ER TOOL HOLDER FOR AUTOMATIC LATHE



小徑 / 直柄 ER 自動車床用刀桿

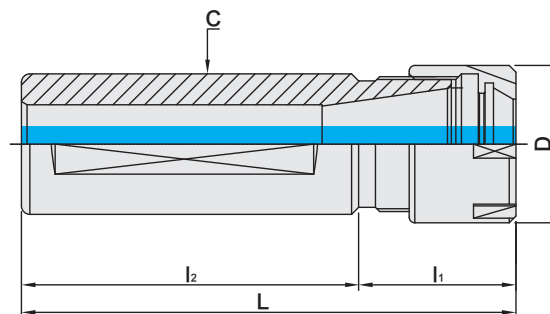

MODEL NO.	TYPE	L	l ₁	l ₂	C	D	WEIGHT (KGS)
5273-123-02011-060	C20 x ER11M - 60	76.6	16.6	60	20	16	0.14
5273-123-02016-060	C20 x ER16M - 60	84.6	24.6	60	20	22	0.14
5273-123-02211-060	C22 x ER11M - 60	76.6	16.6	60	22	16	0.26
5273-123-02216-060	C22 x ER16M - 60	84.6	24.6	60	22	22	0.28
5273-123-02311-060	C23 x ER11M - 60	76.6	16.6	60	23	16	0.30
5273-123-02316-060	C23 x ER16M - 60	86.6	26.6	60	23	22	0.32
5273-123-02520-060	C25 x ER20M - 60	88	28	60	25	28	0.22

Standard Accessory: • NUT

Collet	Nut	Spigot Interchangeable Digital	Torque Wrench Adapter (Nut)	Spanner
P.X-19~45	P.X-64	P.X-81	P.X-82	P.X-87




STRAIGHT SHANK

ER TAPPER FOR CNC LATHE



直柄伸縮 ER 攻牙器 [CNC車床專用]

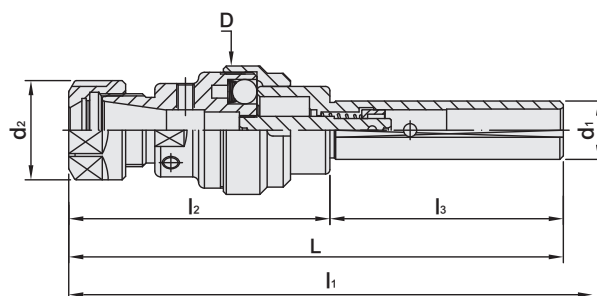

MODEL NO.	TYPE	D	d ₁	d ₂	L	l ₁	l ₂	l ₃	COLLET	CAPACITY	WEIGHT (KGS)
5271-697-0200-080	TP - 20	44	20	34	159	172	79	80	ER20	M3 ~ M17	0.50
5271-697-2250-080	TP - 225	44	25	34	159	172	79	80	ER20	M3 ~ M17	0.70
5271-697-2320-080	TP - 232	44	32	34	159	172	79	80	ER20	M3 ~ M17	0.90
5271-681-0200-080	STP - 20	37	20	34	155	172	75	80	ER20	M3 ~ M17	1.00
5271-697-0320-080	TP - 32	56	32	50	174.5	190	94.5	80	ER32	M3 ~ M27	1.60
5271-698-3201/2-086	TPM - 320	44	MTB3	34	165	178	79	86	ER20	M3 ~ M17	1.40
5271-698-4201/2-086	TPM - 420	44	MTB4	34	165	178	79	86	ER20	M3 ~ M17	1.60
5271-698-4321/2-109	TPM - 432	56	MTB4	50	203.5	216.5	94.5	109	ER32	M3 ~ M27	1.80

Features:

- ▶ Used with ER Rigid Tap Collet or ER Collet to hold taps.
- ▶ Flexible design can avoid any tap breakage resulting from overdoing, spindle's counterclockwise turning and turret moving.
- ▶ Good floating assembly, can be automatic to correct deviation of repeated position in workpiece.
- ▶ TPM-320, TPM-420 and TPM-432 are designed to tighten the tool holder and ER taper by inside thread. There are metric type and inch type for the inside thread. Please inform us which type you need when making an order.

NOTE:

- ▶ If the processing material is harder, the m/min becomes slower relatively.
- ▶ Before using the Straight Shank ER Tapper, please decide spindle running speed of Lathe Machine; otherwise, it will make the Shank and Tap break or split because of too fast or too slow speed.


Standard Accessory: • NUT

Collet	Nut	Spigot Interchangeable Digital	Torque Wrench Adapter (Nut)	Spanner
				
PX-19~22,37~38	P.X-63	P.X-81	P.X-82	P.X-87



STRAIGHT SHANK SBL COLLET CHUCK

直柄 SBL 小徑延長桿

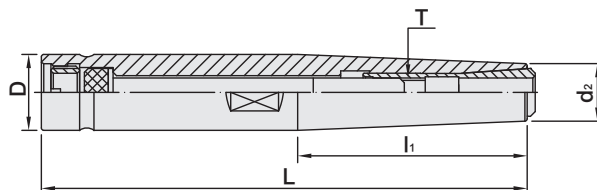

MODEL NO.	TYPE	L	l ₁	D	d ₂	T	WEIGHT (KGS)
5272-648-01206-120	C 12 x SBL6 - 120	120	-	12	12	M6 x 1.0P	0.16
5272-648-01206-150	C 12 x SBL6 - 150	150	-	12	12	M6 x 1.0P	0.18
5272-648-01606-120	C 16 x SBL6 - 120	120	48	16	12	M6 x 1.0P	0.21
5272-648-01606-150	C 16 x SBL6 - 150	150	48	16	12	M6 x 1.0P	0.22
5272-648-01606-200	C 16 x SBL6 - 200	200	48	16	12	M6 x 1.0P	0.24
5272-648-02006-120	C 20 x SBL6 - 120	120	76.5	20	12	M6 x 1.0P	0.36
5272-648-02006-150	C 20 x SBL6 - 150	150	86	20	12	M6 x 1.0P	0.23
5272-648-02006-200	C 20 x SBL6 - 200	200	76.5	20	12	M6 x 1.0P	0.25
5272-648-02506-120	C 25 x SBL6 - 120	120	60	25	14	M6 x 1.0P	0.33
5272-648-02506-150	C 25 x SBL6 - 150	150	60	25	14	M6 x 1.0P	0.34
5272-648-02506-200	C 25 x SBL6 - 200	200	60	25	14	M6 x 1.0P	0.36
5272-648-02512-120	C 25 x SBL12 - 120	120	50	25	22	M10 x 1.5P	0.34
5272-648-02512-150	C 25 x SBL12 - 150	150	50	25	22	M10 x 1.5P	0.35
5272-648-02512-200	C 25 x SBL12 - 200	200	50	25	22	M10 x 1.5P	0.37
5272-648-A3206-127	1/2" x SBL6 - 5"	127	48	12.7	12	M6 x 1.0P	0.16
5272-648-A3206-152	1/2" x SBL6 - 6"	152.4	48	12.7	12	M6 x 1.0P	0.18
5272-648-A4006-127	5/8" x SBL6 - 5"	127	48	15.875	12	M6 x 1.0P	0.21
5272-648-A4006-152	5/8" x SBL6 - 6"	152.4	48	15.875	12	M6 x 1.0P	0.22
5272-648-A4006-203	5/8" x SBL6 - 8"	203.2	48	15.875	12	M6 x 1.0P	0.24
5272-648-A4806-127	3/4" x SBL6 - 5"	127	76.5	19.05	12	M6 x 1.0P	0.22
5272-648-A4806-152	3/4" x SBL6 - 6"	152.4	86	19.05	12	M6 x 1.0P	0.23
5272-648-A4806-203	3/4" x SBL6 - 8"	203.2	76.5	19.05	12	M6 x 1.0P	0.25
5272-648-A6406-127	1" x SBL6 - 5"	127	60	25.4	14	M6 x 1.0P	0.33
5272-648-A6406-152	1" x SBL6 - 6"	152.4	60	25.4	14	M6 x 1.0P	0.34
5272-648-A6406-203	1" x SBL6 - 8"	203.2	60	25.4	14	M6 x 1.0P	0.36
5272-648-A6412-127	1" x SBL12 - 5"	127	56	25.4	22	M10 x 1.5P	0.34
5272-648-A6412-152	1" x SBL12 - 6"	152.4	56	25.4	22	M10 x 1.5P	0.35
5272-648-A6412-203	1" x SBL12 - 8"	203.2	56	25.4	22	M10 x 1.5P	0.37


Standard Accessory: • SPANNER

Collet	Spanner	Screw
		
P.X-49	P.X-89	P.X-125



STRAIGHT SHANK SBLC COLLET CHUCK

直柄 SBLC 小徑延長桿

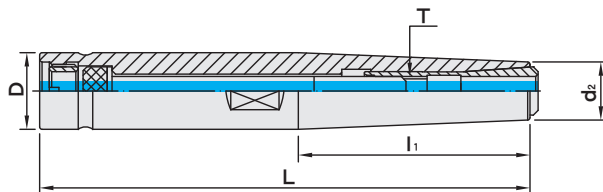

MODEL NO.	TYPE	L	l ₁	D	d ₂	T	WEIGHT (KGS)
5272-623-01206-120	C 12 x SBLC6 - 120	120	-	12	12	M6 x 1.0P	0.16
5272-623-01206-150	C 12 x SBLC6 - 150	150	-	12	12	M6 x 1.0P	0.18
5272-623-01606-120	C 16 x SBLC6 - 120	120	48	16	12	M6 x 1.0P	0.21
5272-623-01606-150	C 16 x SBLC6 - 150	150	48	16	12	M6 x 1.0P	0.22
5272-623-01606-200	C 16 x SBLC6 - 200	200	48	16	12	M6 x 1.0P	0.24
5272-623-02006-120	C 20 x SBLC6 - 120	120	76.5	20	12	M6 x 1.0P	0.36
5272-623-02006-150	C 20 x SBLC6 - 150	150	86	20	12	M6 x 1.0P	0.23
5272-623-02006-200	C 20 x SBLC6 - 200	200	76.5	20	12	M6 x 1.0P	0.25
5272-623-02506-120	C 25 x SBLC6 - 120	120	60	25	14	M6 x 1.0P	0.33
5272-623-02506-150	C 25 x SBLC6 - 150	150	60	25	14	M6 x 1.0P	0.34
5272-623-02506-200	C 25 x SBLC6 - 200	200	60	25	14	M6 x 1.0P	0.36
5272-623-02512-120	C 25 x SBLC12 - 120	120	50	25	22	M10 x 1.5P	0.34
5272-623-02512-150	C 25 x SBLC12 - 150	150	50	25	22	M10 x 1.5P	0.35
5272-623-02512-200	C 25 x SBLC12 - 200	200	50	25	22	M10 x 1.5P	0.37
5272-623-A3206-127	1/2" x SBLC6 - 5"	127	48	12.7	12	M6 x 1.0P	0.16
5272-623-A3206-152	1/2" x SBLC6 - 6"	152.4	48	12.7	12	M6 x 1.0P	0.18
5272-623-A4006-127	5/8" x SBLC6 - 5"	127	48	15.875	12	M6 x 1.0P	0.21
5272-623-A4006-152	5/8" x SBLC6 - 6"	152.4	48	15.875	12	M6 x 1.0P	0.22
5272-623-A4006-203	5/8" x SBLC6 - 8"	203.2	48	15.875	12	M6 x 1.0P	0.24
5272-623-A4806-127	3/4" x SBLC6 - 5"	127	76.5	19.05	12	M6 x 1.0P	0.22
5272-623-A4806-152	3/4" x SBLC6 - 6"	152.4	86	19.05	12	M6 x 1.0P	0.23
5272-623-A4806-203	3/4" x SBLC6 - 8"	203.2	76.5	19.05	12	M6 x 1.0P	0.25
5272-623-A6406-127	1" x SBLC6 - 5"	127	60	25.4	14	M6 x 1.0P	0.33
5272-623-A6406-152	1" x SBLC6 - 6"	152.4	60	25.4	14	M6 x 1.0P	0.34
5272-623-A6406-203	1" x SBLC6 - 8"	203.2	60	25.4	14	M6 x 1.0P	0.36
5272-623-A6412-127	1" x SBLC12 - 5"	127	56	25.4	22	M10 x 1.5P	0.34
5272-623-A6412-152	1" x SBLC12 - 6"	152.4	56	25.4	22	M10 x 1.5P	0.35
5272-623-A6412-203	1" x SBLC12 - 8"	203.2	56	25.4	22	M10 x 1.5P	0.37


Standard Accessory: • SPANNER

Sealed Collet	Spanner	Screw
P.X-50~51	P.X-89	P.X-125



STRAIGHT SHANK EBL COLLET CHUCK

直柄 EBL 小徑延長桿

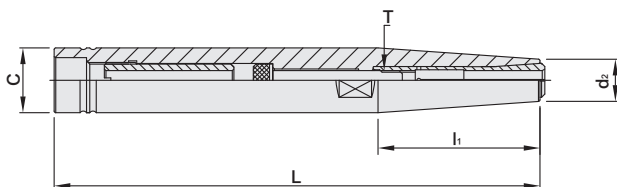

MODEL NO.	TYPE	L	l ₁	d ₂	T	C	SIZE RANGE	WEIGHT (KGS)
5272-277-01206-120-0	C12 x EBL6 - 120	120	-	12	M6	12	3 ~ 6	0.12
5272-277-01206-150-0	C12 x EBL6 - 150	150	-	12	M6	12	3 ~ 6	0.15
5272-277-01606-120-0	C16 x EBL6 - 120	120	50	13	M6	16	3 ~ 6	0.13
5272-277-01606-150-0	C16 x EBL6 - 150	150	50	13	M6	16	3 ~ 6	0.17
5272-277-01606-200-0	C16 x EBL6 - 200	200	100	13	M6	16	3 ~ 6	0.24
5272-277-02006-120-0	C20 x EBL6 - 120	120	50	13	M6	20	3 ~ 6	0.21
5272-277-02006-150-0	C20 x EBL6 - 150	150	50	13	M6	20	3 ~ 6	0.28
5272-277-02006-200-0	C20 x EBL6 - 200	200	100	13	M6	20	3 ~ 6	0.38
5272-277-02008-120-0	C20 x EBL8 - 120	120	-	20	M8	20	3 ~ 8	0.18
5272-277-02008-150-0	C20 x EBL8 - 150	150	-	20	M8	20	3 ~ 8	0.25
5272-277-02008-200-0	C20 x EBL8 - 200	200	-	20	M8	20	3 ~ 8	0.35
5272-277-02506-120-0	C25 x EBL6 - 120	120	50	13	M6	25	3 ~ 6	0.33
5272-277-02506-150-0	C25 x EBL6 - 150	150	50	13	M6	25	3 ~ 6	0.44
5272-277-02506-200-0	C25 x EBL6 - 200	200	100	13	M6	25	3 ~ 6	0.62
5272-277-02508-120-0	C25 x EBL8 - 120	120	50	19	M8	25	3 ~ 8	0.32
5272-277-02508-150-0	C25 x EBL8 - 150	150	50	19	M8	25	3 ~ 8	0.42
5272-277-02508-200-0	C25 x EBL8 - 200	200	100	19	M8	25	3 ~ 8	0.59

INCHES

5272-277-A3206-127-0	C1/2" x EBL6-5"	5	-	0.5	M6	0.5	1/8 ~ 1/4	0.14
5272-277-A3206-152-0	C1/2" x EBL6-6"	6	-	0.5	M6	0.5	1/8 ~ 1/4	0.16
5272-277-A4006-127-0	C5/8" x EBL6-5"	5	1.969	0.512	M6	0.625	1/8 ~ 1/4	0.13
5272-277-A4006-152-0	C5/8" x EBL6-6"	6	1.969	0.512	M6	0.625	1/8 ~ 1/4	0.17
5272-277-A4006-203-0	C5/8" x EBL6-8"	8	3.937	0.512	M6	0.625	1/8 ~ 1/4	0.24
5272-277-A4806-127-0	C3/4" x EBL6-5"	5	1.969	0.512	M6	0.75	1/8 ~ 1/4	0.19
5272-277-A4806-152-0	C3/4" x EBL6-6"	6	1.969	0.512	M6	0.75	1/8 ~ 1/4	0.25
5272-277-A4806-203-0	C3/4" x EBL6-8"	8	3.937	0.512	M6	0.75	1/8 ~ 1/4	0.35
5272-277-A4808-127-0	C3/4" x EBL8-5"	5	1.969	0.75	M8	0.75	1/8 ~ 5/16	0.13
5272-277-A4808-152-0	C3/4" x EBL8-6"	6	1.969	0.75	M8	0.75	1/8 ~ 5/16	0.17
5272-277-A4808-203-0	C3/4" x EBL8-8"	8	3.937	0.75	M8	0.75	1/8 ~ 5/16	0.24
5272-277-A6406-127-0	C1" x EBL6-5"	5	1.969	0.512	M6	1	1/8 ~ 1/4	0.19
5272-277-A6406-152-0	C1" x EBL6-6"	6	1.969	0.512	M6	1	1/8 ~ 1/4	0.25
5272-277-A6406-203-0	C1" x EBL6-8"	8	3.937	0.512	M6	1	1/8 ~ 1/4	0.35
5272-277-A6408-127-0	C1" x EBL8-5"	5	1.969	0.748	M8	1	1/8 ~ 5/16	0.16
5272-277-A6408-152-0	C1" x EBL8-6"	6	1.969	0.748	M8	1	1/8 ~ 5/16	0.22
5272-277-A6408-203-0	C1" x EBL8-8"	8	3.937	0.748	M8	1	1/8 ~ 5/16	0.31


Standard Accessory: • SPANNER

Collet	Spanner	Screw
P.X-52	P.X-89	P.X-125



STRAIGHT SHANK EBL TUNGSTEN STEEL COLLET CHUCK

直柄 EBL 小徑鎢鋼延長桿

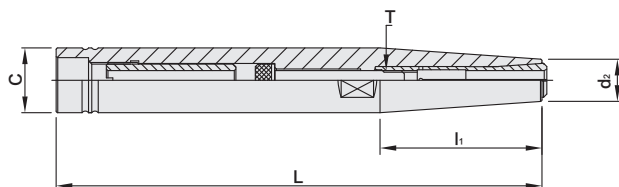

MODEL NO.	TYPE	L	l ₁	d ₂	T	C	SIZE RANGE	WEIGHT (KGS)
5272-277-01606-150-3	W16 x EBL6 - 150	150	50	13	M6	16	3 ~ 6	0.36
5272-277-02006-200-3	W20 x EBL6 - 200	200	100	13	M6	20	3 ~ 6	0.48




Standard Accessory: • HEX WRENCH • FIXING WRENCH

Collet	Spanner	Screw
		
P.X-52	P.X-89	P.X-125



STRAIGHT SHANK EBLC COLLET CHUCK

直柄 EBLC 小徑延長桿

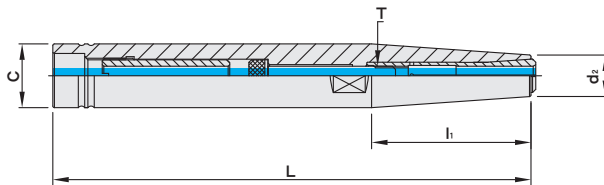

MODEL NO.	TYPE	L	l ₁	d ₂	T	C	SIZE RANGE	WEIGHT (KGS)
5272-195-01206-120	C12 x EBLC6 - 120	120	-	12	M6	12	3 ~ 6	0.12
5272-195-01206-150	C12 x EBLC6 - 150	150	-	12	M6	12	3 ~ 6	0.15
5272-195-01606-120	C16 x EBLC6 - 120	120	50	13	M6	16	3 ~ 6	0.13
5272-195-01606-150	C16 x EBLC6 - 150	150	50	13	M6	16	3 ~ 6	0.17
5272-195-01606-200	C16 x EBLC6 - 200	200	100	13	M6	16	3 ~ 6	0.24
5272-195-02006-120	C20 x EBLC6 - 120	120	50	13	M6	20	3 ~ 6	0.21
5272-195-02006-150	C20 x EBLC6 - 150	150	50	13	M6	20	3 ~ 6	0.28
5272-195-02006-200	C20 x EBLC6 - 200	200	100	13	M6	20	3 ~ 6	0.38
5272-195-02008-120	C20 x EBLC8 - 120	120	-	20	M8	20	3 ~ 8	0.18
5272-195-02008-150	C20 x EBLC8 - 150	150	-	20	M8	20	3 ~ 8	0.25
5272-195-02008-200	C20 x EBLC8 - 200	200	-	20	M8	20	3 ~ 8	0.35
5272-195-02506-120	C25 x EBLC6 - 120	120	50	13	M6	25	3 ~ 6	0.33
5272-195-02506-150	C25 x EBLC6 - 150	150	50	13	M6	25	3 ~ 6	0.44
5272-195-02506-200	C25 x EBLC6 - 200	200	100	13	M6	25	3 ~ 6	0.62
5272-195-02508-120	C25 x EBLC8 - 120	120	50	19	M8	25	3 ~ 8	0.32
5272-195-02508-150	C25 x EBLC8 - 150	150	50	19	M8	25	3 ~ 8	0.42
5272-195-02508-200	C25 x EBLC8 - 200	200	100	19	M8	25	3 ~ 8	0.59

INCHES

5272-195-A3206-127	C1/2" x EBLC6 - 5"	5	-	0.5	M6	0.5	1/8 ~ 1/4	0.14
5272-195-A3206-152	C1/2" x EBLC6 - 6"	6	-	0.5	M6	0.5	1/8 ~ 1/4	0.16
5272-195-A4006-127	C5/8" x EBLC6 - 5"	5	1.969	0.512	M6	0.625	1/8 ~ 1/4	0.13
5272-195-A4006-152	C5/8" x EBLC6 - 6"	6	1.969	0.512	M6	0.625	1/8 ~ 1/4	0.17
5272-195-A4006-203	C5/8" x EBLC6 - 8"	8	3.937	0.512	M6	0.625	1/8 ~ 1/4	0.24
5272-195-A4806-127	C3/4" x EBLC6 - 5"	5	1.969	0.512	M6	0.75	1/8 ~ 1/4	0.19
5272-195-A4806-152	C3/4" x EBLC6 - 6"	6	1.969	0.512	M6	0.75	1/8 ~ 1/4	0.25
5272-195-A4806-203	C3/4" x EBLC6 - 8"	8	3.937	0.512	M6	0.75	1/8 ~ 1/4	0.35
5272-195-A4808-127	C3/4" x EBLC8 - 5"	5	1.969	0.75	M8	0.75	1/8 ~ 5/16	0.13
5272-195-A4808-152	C3/4" x EBLC8 - 6"	6	1.969	0.75	M8	0.75	1/8 ~ 5/16	0.17
5272-195-A4808-203	C3/4" x EBLC8 - 8"	8	3.937	0.75	M8	0.75	1/8 ~ 5/16	0.24
5272-195-A6406-127	C1" x EBLC6 - 5"	5	1.969	0.512	M6	1	1/8 ~ 1/4	0.19
5272-195-A6406-152	C1" x EBLC6 - 6"	6	1.969	0.512	M6	1	1/8 ~ 1/4	0.25
5272-195-A6406-203	C1" x EBLC6 - 8"	8	3.937	0.512	M6	1	1/8 ~ 1/4	0.35
5272-195-A6408-127	C1" x EBLC8 - 5"	5	1.969	0.748	M8	1	1/8 ~ 5/16	0.16
5272-195-A6408-152	C1" x EBLC8 - 6"	6	1.969	0.748	M8	1	1/8 ~ 5/16	0.22
5272-195-A6408-203	C1" x EBLC8 - 8"	8	3.937	0.748	M8	1	1/8 ~ 5/16	0.31


Standard Accessory: • SPANNER

Collet	Spanner	Screw
P.X-52	P.X-89	P.X-125



STRAIGHT SHANK SIDE LOCK HOLDER

C / SL 直柄側固式延長小徑刀柄

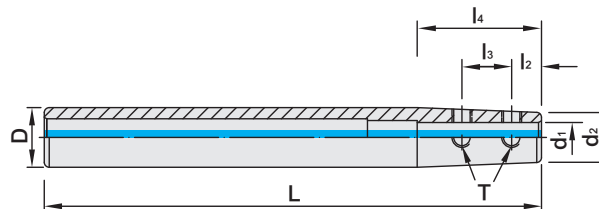

MODEL NO.	TYPE	L	l ₂	l ₃	l ₄	D	d ₁	d ₂	T	WEIGHT (KGS)
5272-803-00803-110	C8 x SL3 - 110	110	6	10	20	8	3	-	M3 x 0.5P	0.10
5272-803-00804-110	C8 x SL4 - 110	110	6	10	25	8	4	8	M3 x 0.5P	0.10
5272-803-01003-150	C10 x SL3 - 150	150	6	10	20	10	3	9	M3 x 0.5P	0.10
5272-803-01004-150	C10 x SL4 - 150	150	6	10	25	10	4	9	M4 x 0.7P	0.10
5272-803-01006-150	C10 x SL6 - 150	150	6	10	25	10	6	-	M4 x 0.7P	0.10
5272-803-01204-150	C12 x SL4 - 150	150	6	10	25	12	4	9	M4 x 0.7P	0.12
5272-803-01206-100	C12 x SL6 - 100	100	6	10	25	12	6	10	M4 x 0.7P	0.10
5272-803-01206-150	C12 x SL6 - 150	150	6	10	25	12	6	10	M4 x 0.7P	0.12
5272-803-01604-150	C16 x SL4 - 150	150	6	10	25	16	4	10	M4 x 0.7P	0.15
5272-803-01604-200	C16 x SL4 - 200	200	6	10	25	16	4	10	M4 x 0.7P	0.18
5272-803-01606-150	C16 x SL6 - 150	150	6	10	25	16	6	13	M4 x 0.7P	0.15
5272-803-01606-200	C16 x SL6 - 200	200	6	10	25	16	6	13	M4 x 0.7P	0.18
5272-803-01608-150	C16 x SL8 - 150	150	6	10	25	16	8	15	M4 x 0.7P	0.15
5272-803-01608-200	C16 x SL8 - 200	200	6	10	25	16	8	15	M4 x 0.7P	0.18
5272-803-02006-150	C20 x SL6 - 150	150	6	10	25	20	6	13	M4 x 0.7P	0.18
5272-803-02008-150	C20 x SL8 - 150	150	6	10	25	20	8	15	M6 x 1.0P	0.18
5272-803-02008-200	C20 x SL8 - 200	200	6	10	25	20	8	15	M6 x 1.0P	0.18
5272-803-02010-150	C20 x SL10 - 150	150	6	10	25	20	10	17	M6 x 1.0P	0.18
5272-803-02010-200	C20 x SL10 - 200	200	6	10	25	20	10	17	M6 x 1.0P	0.20
5272-803-02012-150	C20 x SL12 - 150	150	6	10	25	20	12	19	M6 x 1.0P	0.18
5272-803-02012-200	C20 x SL12 - 200	200	6	10	25	20	12	19	M6 x 1.0P	0.20
5272-803-03206-150	C32 x SL6 - 150	150	6	10	25	32	6	13	M6 x 1.0P	0.21
5272-803-03208-150	C32 x SL8 - 150	150	6	10	25	32	8	15	M6 x 1.0P	0.21
5272-803-03210-150	C32 x SL10 - 150	150	6	10	25	32	10	17	M6 x 1.0P	0.22
5272-803-03212-150	C32 x SL12 - 150	150	6	10	25	32	12	19	M6 x 1.0P	0.22

Features:

- Internal hole tolerance:H5.

Lock Screw



P.X-124



MEMO