

AWC JIG TOOLHOLDER CATEGORY

AWC JIG TOOL HOLDER

T-2~3

AWC JIG TOOL HOLDER

For Large-Sized Workpieces

AWC 治具刀桿

[A TYPE]



T W PAT NO. M642506
J P PAT NO. 3242565
D E PAT NO. 202023102622
C N PAT NO. ZL202320717816.0

Fig.1

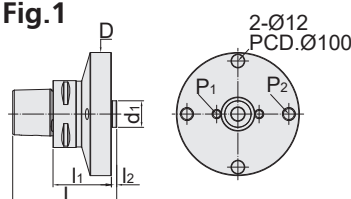


Fig.2





Fig.3



MODEL NO.	TYPE	L	l ₁	l ₂	D	d ₁ 0 -0.13	SCREW HOLES						Fig.	WEIGHT (KGS)
							ØP ₁	TYPE	ØP ₂	TYPE	ØP ₃	TYPE		
5143-027-116-055	PSC63 x AWC116A - 55 - LS	98	55	5	116	25	40	M8	96	M12	-	-	1	6.88
5143-027-157-055	PSC63 x AWC157A - 55 - LS	98	55	5	157	25	50	M12	100	M12	135	M10	2	12.12
5144-027-176-080	PSC80 x AWC176A - 80 - LS	133	80	5	176	25	50	M12	150	M12	135	M10	3	15.65
5073-027-116-055	HSK63A x AWC116A - 55 - LS	92	55	5	116	25	40	M8	96	M12	-	-	1	10.55
5073-027-157-055	HSK63A x AWC157A - 55 - LS	92	55	5	157	25	50	M12	100	M12	135	M10	2	7.77
5075-027-176-080	HSK100A x AWC176A - 80 - LS	135	80	5	176	25	50	M12	150	M12	135	M10	3	23.32
573T-027-116-055	HSK-T63 x AWC116A - 55 - LS	92	55	5	116	25	40	M8	96	M12	-	-	1	10.55
573T-027-157-055	HSK-T63 x AWC157A - 55 - LS	92	55	5	157	25	50	M12	100	M12	135	M10	2	7.77
575T-027-176-080	HSK-T100 x AWC176A - 80 - LS	135	80	5	176	25	50	M12	150	M12	135	M10	3	23.32

Product Clamping Application:

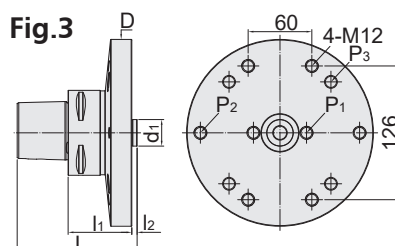

Features:

- ▶ Workpiece or mold/fixture can be pre-loaded in AWC jig tool holder offline to save machine downtime.
- ▶ There are different sizes of screw holes on the face of AWC, providing various clamping applications.
- ▶ AWC jig tool holder can be customized.
- ▶ Used for machine tables with quick positioning and clamping system.



Reminder:

- ▶ If a machine doesn't have a built-in quick positioning and clamping system, customer can install manual or hydraulic clamping system on the machine table.



AWC JIG TOOL HOLDER

For Small-Sized Workpieces

AWC 治具刀桿

(B TYPE)



T W PAT NO. M642506
J P PAT NO. 3242565
D E PAT NO. 202023102622
C N PAT NO. ZL202320717816.0

Fig.1




Fig.2





Fig.3



MODEL NO.	TYPE	L	l ₁	l ₂	D	d ₁ +0.13 0	SCREW HOLES						Fig.	WEIGHT (KGS)
							ØP ₁	TYPE	ØP ₂	TYPE	ØP ₃	TYPE		
5143-028-116-055	PSC63 x AWC116B - 55 - LS	93	55	18	116	25	40	M8	96	M12	-	-	1	6.82
5143-028-157-055	PSC63 x AWC157B - 55 - LS	93	55	18	157	25	50	M12	100	M12	135	M10	2	12.05
5144-028-176-080	PSC80 x AWC176B - 80 - LS	128	80	18	176	25	50	M12	150	M12	-	-	3	15.60
5073-028-116-055	HSK63A x AWC116B - 55 - LS	87	55	18	116	25	40	M8	96	M12	135	M10	1	10.47
5073-028-157-055	HSK63A x AWC157B - 55 - LS	87	55	18	157	25	50	M12	100	M12	135	M10	2	7.69
5075-028-176-080	HSK100A x AWC176B - 80 - LS	130	80	18	176	25	50	M12	150	M12	135	M10	3	15.45
573T-028-116-055	HSK-T63 x AWC116B - 55 - LS	87	55	18	116	25	40	M8	96	M12	135	M10	1	10.47
573T-028-157-055	HSK-T63 x AWC157B - 55 - LS	87	55	18	157	25	50	M12	100	M12	135	M10	2	7.69
575T-028-176-080	HSK-T100 x AWC176B - 80 - LS	130	80	18	176	25	50	M12	150	M12	135	M10	3	15.45

Product Clamping Application:

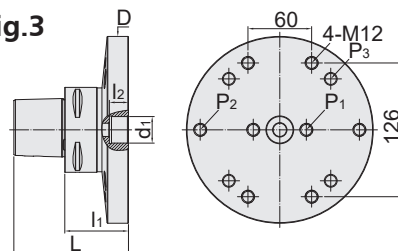

Features:

- ▶ Workpiece or mold/fixture can be pre-loaded in AWC jig tool holder offline to save machine downtime.
- ▶ There are different sizes of screw holes on the face of AWC, providing various clamping applications.
- ▶ AWC jig tool holder can be customized.
- ▶ Used for machine tables with quick positioning and clamping system.



Reminder:

- ▶ If a machine doesn't have a built-in quick positioning and clamping system, customer can install manual or hydraulic clamping system on the machine table.



MEMO

