




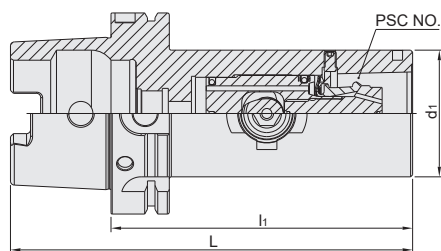

# HANDLE QUICK CHANGE ADAPTER



FOR PSC EXTERNAL TURNING TOOLS



SHANK	MODEL NO.	TYPE	NO.	L	l <sub>1</sub>	d <sub>1</sub>	TORQUE		WEIGHT (KGS)
							Nm	ft.lbs	
 DaulDRIVE+	5027-016-143-150	SBT50 x PSC63 - 150HQC	PSC63	251.8	150	63	90	67	5.67
	5027-016-143-200	SBT50 x PSC63 - 200HQC	PSC63	301.8	200	63	90	67	6.75
 DaulDRIVE+	5067-016-143-150	SDAT50 x PSC63 - 150HQC	PSC63	251.75	150	63	90	67	5.15
	5067-016-143-200	SDAT50 x PSC63 - 200HQC	PSC63	301.75	200	63	90	67	6.20
 ISO 12164-1	5075-016-143-150	HSK100A x PSC63 - 150HQC	PSC63	200	150	63	90	67	4.40
	5075-016-143-200	HSK100A x PSC63 - 200HQC	PSC63	250	200	63	90	67	5.45
 ISO 12164-3	575T-016-143-150	HSK-T100 x PSC63 - 150HQC	PSC63	200	150	63	90	67	4.40
	575T-016-143-200	HSK-T100 x PSC63 - 200HQC	PSC63	250	200	63	90	67	5.45

## Product Information

- ▶ The HQC adapter is designed with jaw-clamping mechanism, which is different from a screw-tightening design. It only requires a 1/2 turn using a hex wrench to quickly hold and release the tool.
- ▶ Used for machines using non-rotation tools.
- ▶ It can significantly reduce tool change and clamping time when used on a vertical lathe without ATC functionality.
- ▶ PSC interface allows tool measurement offline. It saves the downtime and increases production efficiency.
- ▶ It's center coolant available with coolant pressure durability up to 20 bar.



心源工業股份有限公司  
SHIN-YAIN INDUSTRIAL CO., LTD.

436406 台中市清水區菁埔路198號  
NO.198, Jingpu Rd., Qingshui Dist,  
Taichung City 436406, Taiwan

Tel: +886-4-26237575  
Fax: +886-4-26237676  
E-mail: sales@syic.com



www.syic.com