


SAC ANGLE HEAD HOLDER

中鋼炮銑削頭



Machine
spindle

BT/STB
CAT/SCAT
DAT/SDAT
HSK/PSC



**Japanese-made
Bearing**

Precision: P4




Ground Gear

JIS B1704 : 1978 : 2


Output

ER16/20/25/32
SK310/16
FMB22/FMA25.4
SCA22/25.4

- ▶ Max. revolution: 3,000rpm.
- ▶ Max. torque: 25N-m.
- ▶ Internal coolant not available.
- ▶ ATC is available for all angle head series.

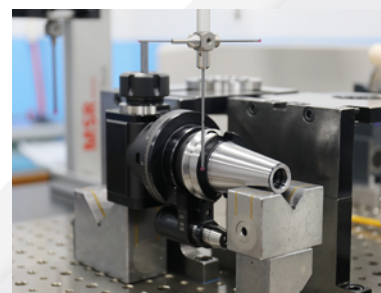

**Circular runout: $\leq 20\mu\text{m}$
Angularity: $\pm 8\mu\text{m}$**

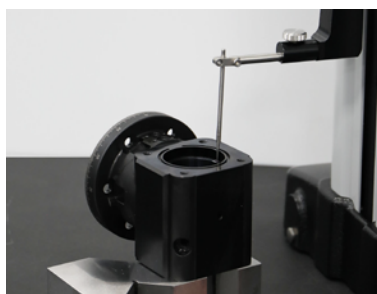


Measuring precision



Roundness: $2\mu\text{m}$



Taper tolerance: $<AT3$

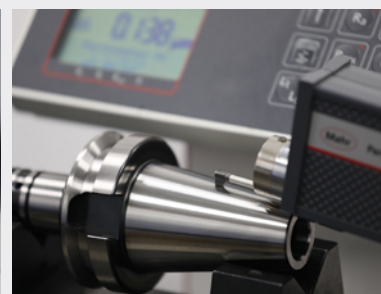

**Surface roughness:
 $Ra < 0.25\mu\text{m}$**



心源工業股份有限公司
SHIN-YAIN INDUSTRIAL CO., LTD.

43644 台中市清水區菁埔路198號
NO.198, Jingpu Rd., Qingshui Dist,
Taichung City 436, Taiwan

Tel: +886-4-26237575
Fax: +886-4-26237676
E-mail: sales@syic.com

