


PRECISION  
ADJUSTABLE

<5μm

# SAF RUNOUT ADJUSTABLE HOLDER

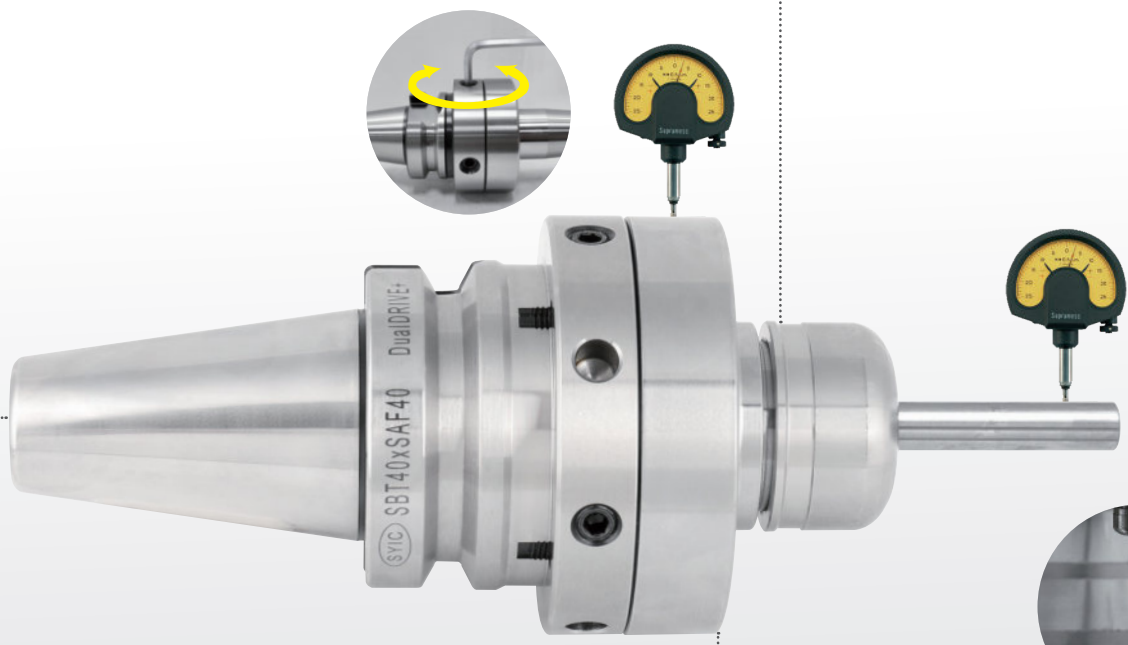

▶ Output choices: SK3, UT and SFC.

0 ~ 5 μm

▶ BT/SBT, CAT/SCAT, DAT/SDAT, HSK and PSC are available.

▶ Drive axial and radial set screws for precision adjustment and the runout accuracy of the tool edge can be adjusted within 5 μm.

