

SAR ANGLE HEAD HOLDER

大鋼炮銑削頭



Coolant
dowel pin


Machine
spindle

BT/SBT
CAT/SCAT
DAT/SDAT

Coolant through coolant nozzle

Output

SBT30
PSC50
ER40
MLD32
FMA25.4



Japanese-made
Bearing


Precision: P4




Ground Gear

JIS B1704 : 1978 : 2

- ▶ Max. revolution: 3,000rpm.
- ▶ Max. torque: 50N-m.
- ▶ Max. coolant pressure: 7kgf/cm²(100PSI).
- ▶ ATC is available for all angle head series.

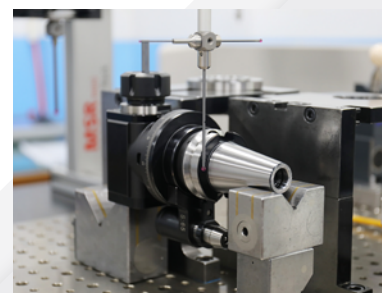

Circular runout: $\leq 20\mu\text{m}$
Angularity: $\pm 8\mu\text{m}$

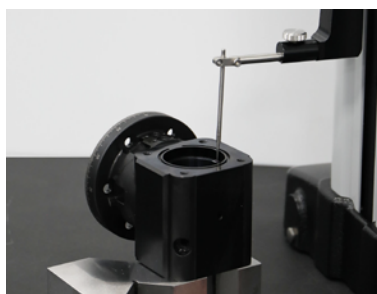


Measuring precision



Roundness: 2 μm



Taper tolerance: <AT3

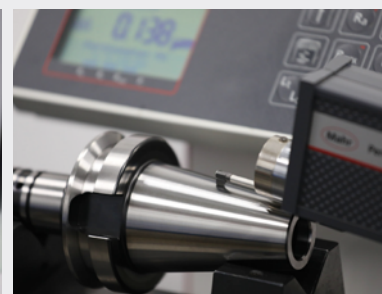

Surface roughness:
Ra<0.25 μm



心源工業股份有限公司
SHIN-YAIN INDUSTRIAL CO., LTD.

43644 台中市清水區菁埔路198號
NO.198, Jingpu Rd., Qingshui Dist,
Taichung City 436, Taiwan

Tel: +886-4-26237575
Fax: +886-4-26237676
E-mail: sales@syic.com

