


SAU ANGLE HEAD HOLDER

萬向銑削頭 [**UNIVERSAL TYPE**]

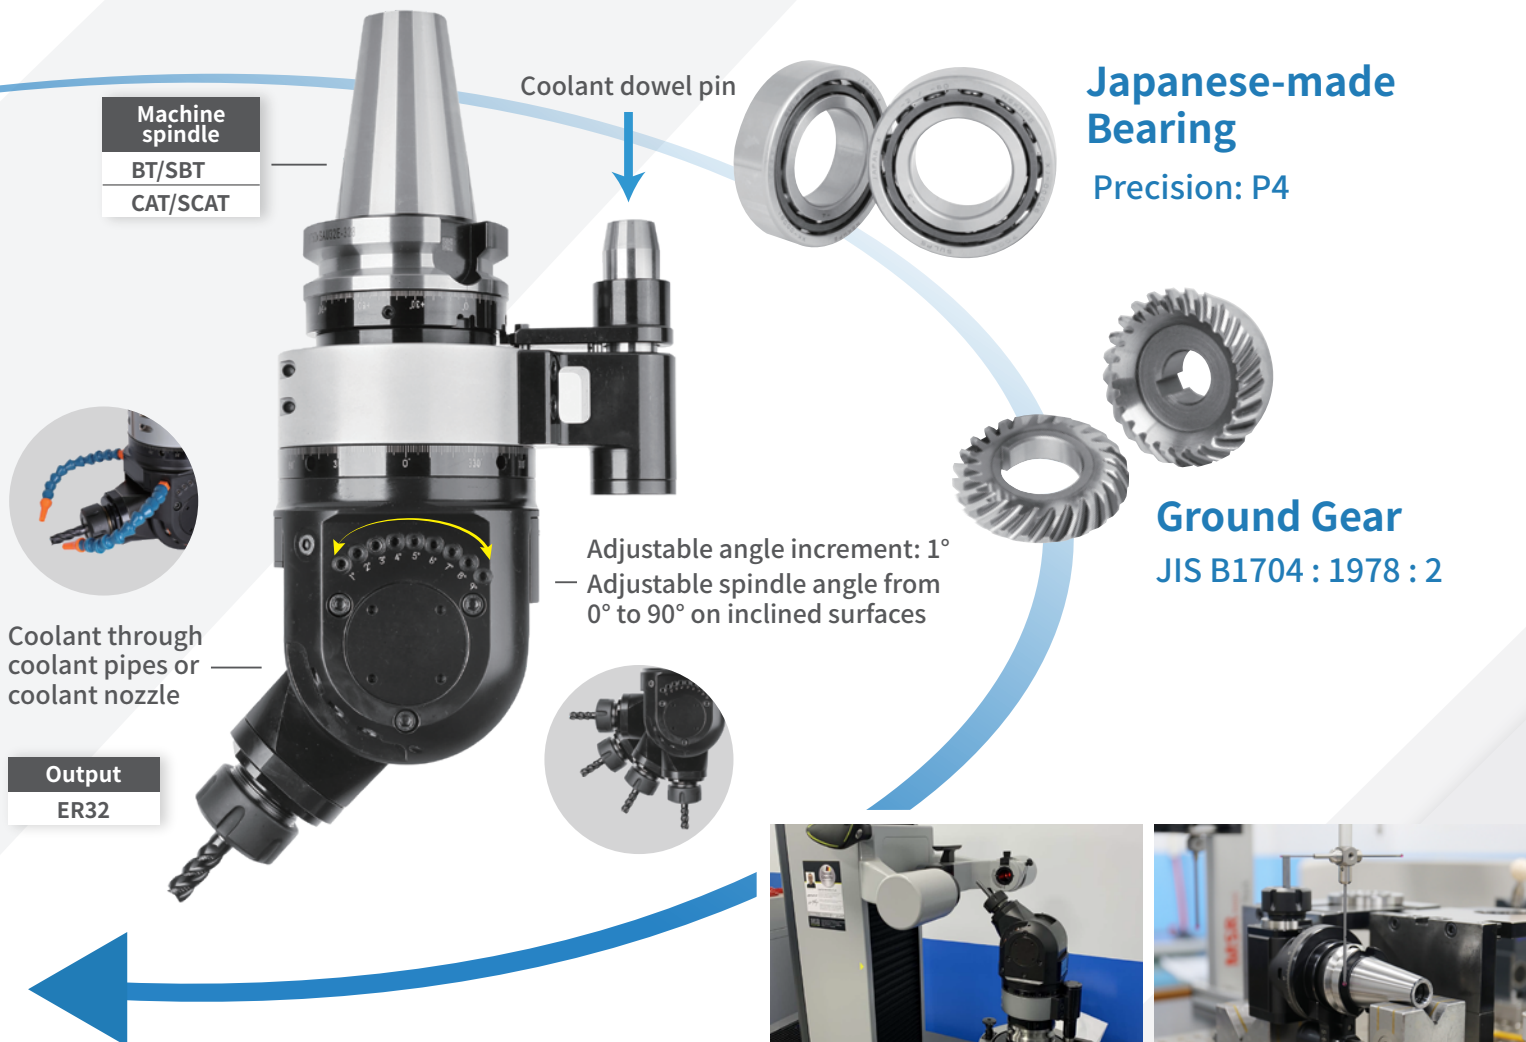

Machine spindle

BT/SBT
CAT/SCAT

Coolant dowel pin

Japanese-made Bearing

Precision: P4

Ground Gear

JIS B1704 : 1978 : 2

Adjustable angle increment: 1°
— Adjustable spindle angle from 0° to 90° on inclined surfaces

Coolant through coolant pipes or coolant nozzle


Output

ER32


- ▶ Max. revolution: 4,000rpm.
- ▶ Max. torque: 40N-m.
- ▶ Max. coolant pressure: 20 kgf/cm² (100PSI).
- ▶ ATC is available for all angle head series.



Measuring precision of angle

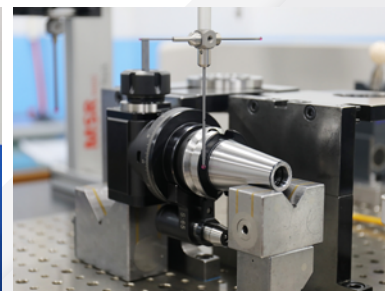

**Circular sunout: $\leq 20\mu\text{m}$
Angularity: $\pm 8\mu\text{m}$**

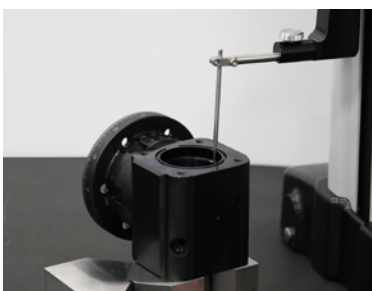


Measuring precision



Roundness: 2 μm



Taper tolerance: <AT3

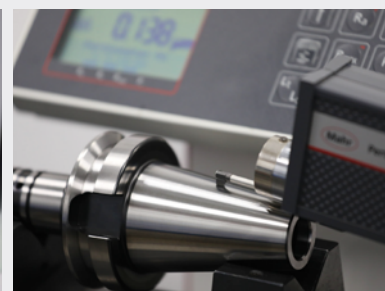

Surface roughness: Ra<0.25 μm



心源工業股份有限公司
SHIN-YAIN INDUSTRIAL CO., LTD.

43644 台中市清水區菁埔路198號
NO.198, Jingpu Rd., Qingshui Dist,
Taichung City 436, Taiwan

Tel: +886-4-26237575
Fax: +886-4-26237676
E-mail: sales@syic.com



www.syic.com